

# RPB-1PM-UNI

## bistable - impulse relays



RPB-1PM-UNI

- **Bistable - impulse relays type "ON-OFF", multifunction with memory**
- Cadmium - free contacts 1 CO • AC/DC input voltages
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Working with momentary bell switches or control buttons ❶
- Compliance with standard EN 61810
- Recognitions, certifications, directives: RoHS, EMC ❷

### Output circuit - contact data

Number and type of contacts	1 CO
Contact material	AgSnO <sub>2</sub>
Max. switching voltage	300 V AC / 300 V DC
Rated load	AC1 16 A / 250 V AC DC1 16 A / 24 V DC
Max. make current	30 A
Rated current	16 A
Max. breaking capacity	AC1 4 000 VA
Min. breaking capacity	1 W 10 V, 10 mA
Contact resistance	≤ 100 mΩ
Max. operating frequency	• at rated load AC1 600 cycles/hour • no load 3 600 cycles/hour

### Input circuit

Rated voltage	AC: 50/60 Hz AC/DC	12...240 V	terminals (+)A1, (-)A2
Must release voltage		AC: ≥ 0,15 U <sub>n</sub>	DC: ≥ 0,05 U <sub>n</sub>
Operating range of supply voltage		0,85...1,15 U <sub>n</sub>	
Rated power consumption		≤ 1,7 W	
<b>Control contact S ❶</b>	• load	no	
	• min. voltage ❸	0,85 U <sub>n</sub>	
	• min. time of pulse duration ❹	≥ 55 ms	

### Insulation according to EN 60664-1

Insulation according to EN 60504-1			
Insulation rated voltage		250 V AC	
Rated surge voltage		4 000 V 1,2 / 50 µs	
Overvoltage category		III	
Insulation pollution degree		2	
Flammability class		V-0 for modular cover, UL 94	
Dielectric strength	• input - output	4 000 V AC	type of insulation: basic
	• contact clearance	1 000 V AC	type of clearance: micro-disconnection

### General data

Operating / release time (typical values)	60 ms / 60 ms
Electrical life	• resistive AC1 0,5 x 10 <sup>5</sup> contact 1 NO, 16 A, 250 V AC ❶
Mechanical life (cycles)	10 <sup>7</sup>
Operation cycle	1:1
Dimensions (L x W x H)	90 ❺ x 17,5 x 64,6 mm
Weight	65 g
Ambient temperature	• storage -40...+70 °C (non-condensation and/or icing) • operating -20...+55 °C
Cover protection category	IP 20 EN 60529
Relative humidity	up to 85%
Shock / vibration resistance	15 g / 0,35 mm DA 10...55 Hz

### Function data

Functions	SET/RESET with memory (NORMAL) SET/RESET (RESET)
LED indicator	green LED U ON - indication of supply voltage U yellow LED R ON/OFF - output relay status

❶ Control contact S provides control of switching ON/OFF of receivers (lighting or other devices) from a few different points, with the use of connected in parallel: momentary bell switches or control buttons; the relays cannot operate with illuminated switches. ❷ EMC tests (electromagnetic compatibility): EN 55011, EN 61000-4-2/3/4/5/6/11. ❸ Where the control signal is recognizable. ❹ Continuous voltage applied between A1, A2, activated with the control contact S. ❺ Length with 35 mm rail catches: 98,8 mm.


27.11.2025

# RPB-1PM-UNI

## bistable - impulse relays

### Functions

**SET/RESET with memory (NORMAL)** - Switching ON and OFF with memory, controlled by pulses on the contact S.




When a pulse occurs on the control input S, the output relay R is activated (SET). This status lasts until another control pulse occurs - then, the output relay R is switched off (RESET).

Further pulses which will occur on the control input S will change the R contact status into an opposite one.

In case the U supply is interrupted and then switched on again, the R contact of the output relay will return to the status prior to switching the U supply off, and the relay will start operation according to the foregoing function.

U - supply voltage; R - output state of the relay; t - time axis

**SET/RESET (RESET)** - Switching ON and OFF, controlled by pulses on the contact S.



After the supply voltage has been applied, the output relay R remains switched off.

When a pulse occurs on the control input S, the output relay R is activated (SET). This status lasts until another control pulse occurs - then, the output relay R is switched off (RESET).

Further pulses which will occur on the control input S will change the R contact status into an opposite one.

Switching the supply off will cause switching the output relay R off. Switching on the supply again and applying a control pulse to the S input will switch the R relay on. Further control pulses which will occur on the control input S will change the R contact status into an opposite one.

### Additional functions


**LEDs:** green U, yellow R - are lit permanently.

**Adjustment of the set values:** the function may be changed after the supply voltage has been switched off and on again. If the memory function was set, and a no-memory function is set next, the memory is cancelled in such case.


**Triggering:** the relay is triggered by connecting the contact S to the A1 terminal, from connected in parallel switches / control buttons. For DC supply, the positive pole must be connected to A1 terminal.

**Supply:** the relay may be supplied with DC voltage or AC voltage 50/60 Hz of 10,2...276 V.

### Dimensions

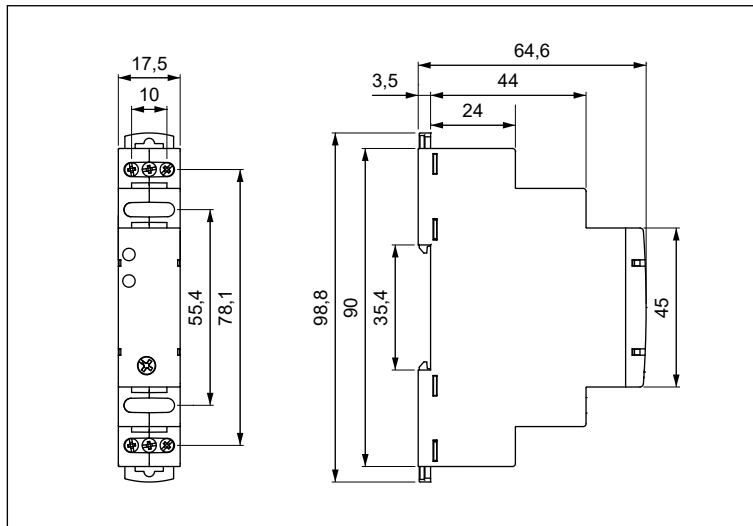


### Front panel description

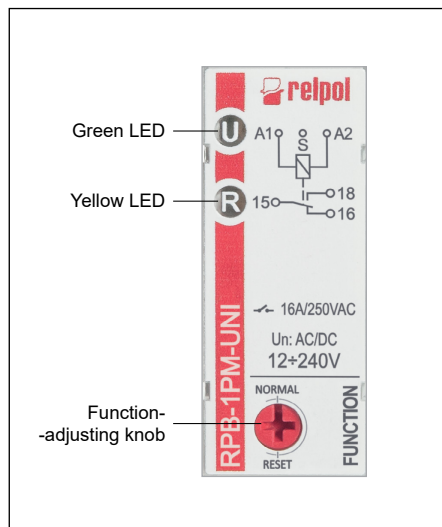

# RPB-1PM-UNI


## bistable - impulse relays

### Connection diagrams

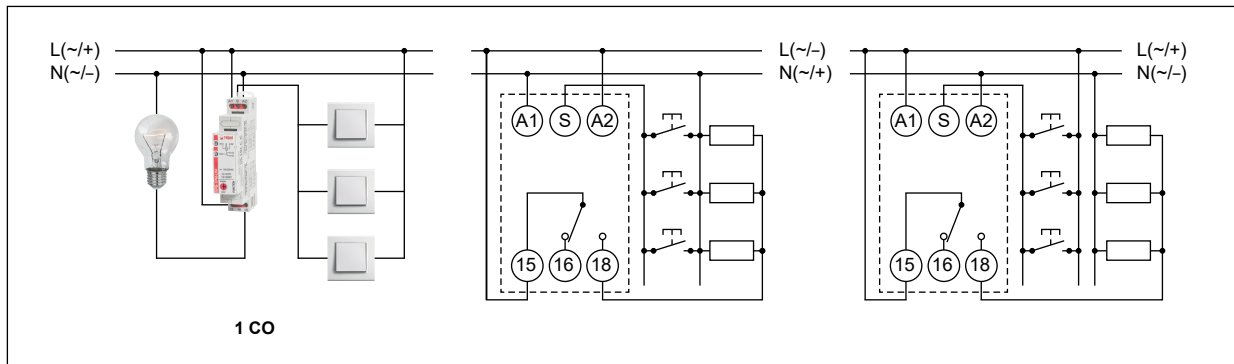


### Mounting

Relays **RPB-1PM-UNI** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm<sup>2</sup> (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




**Two catches:**  
easy mounting  
on 35 mm rail,  
firm hold  
(top and bottom).



**Mounting wires  
in clamps:**  
universal screw  
(cross-recessed  
or slotted head).

### Ordering codes

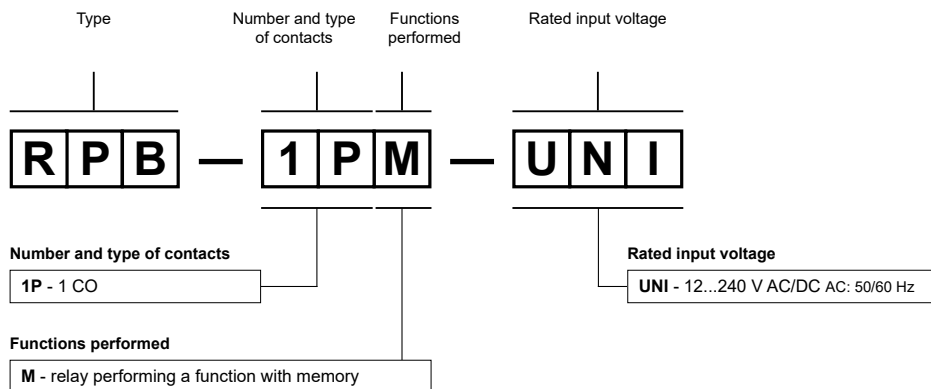

Example of ordering codes:

**RPB-1PM-UNI**

bistable - impulse relay **RPB-1PM-UNI**, multifunction (relay perform 2 functions), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO<sub>2</sub>, rated input voltage 12...240 V AC/DC AC: 50/60 Hz

### PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.