


## Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518,  
519, 525 to 528, 530, 531, 537 to 542, 545 to  
550, 552 to 557, 559, 560, 562, 563




### SOMMAIRE

### PAGES

1. Description, use.....	1
2. Range .....	1
3. Overall dimensions.....	1
4. Preparation - Connection.....	2
5. General characteristics.....	3
6. Conformities and approvals.....	7
7. Auxiliaries .....	7

## 1. DESCRIPTION - USE

### Symbol :



### Technology :

. Electromagnetic contactor

### Use :

. remote control of a load by the mean of a switch

## 2. RANGE

### Rated thermal current :

. I<sub>th</sub> = 40 and 63 A

### Types of contacts :

. « NO », normally open contact

. « NC », normally closed contact

### Poles :

. Double pole in 2 module (2 x 17,8 mm = 35,6 mm)

- « 2NO »

- « 2NC »

. Four pole in 3 modules (3 x 17,8 mm = 53,4 mm)

- « 3NO »

- « 4NO »

- « 4NC »

- « 3NO + 1NC »

### Rated voltage (power contacts) :

. U<sub>n</sub> = 250 V / 400 V ~



### Rated control voltage :

. 24 V and 230 V ~

### Rated frequency, power and control :

. 50 / 60 Hz

## 3. OVERALL DIMENSIONS

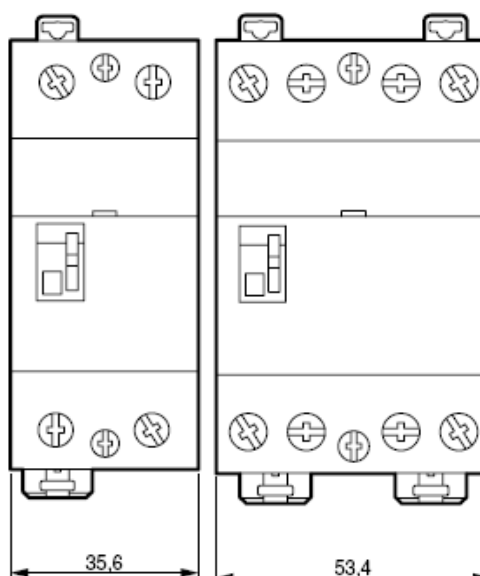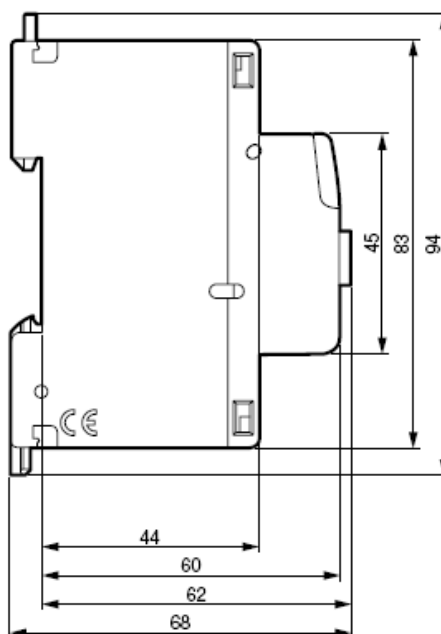

# Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518,  
519, 525 to 528, 530, 531, 537 to 542, 545 to  
550, 552 to 557, 559, 560, 562, 563

## 4. PREPARATION - CONNECTION

### Installation software :

. XL PRO

### Operational positions :

. Vertical, horizontal, upside down, on the side

### Fixing :


. On symmetrical rail EN 50-055 or DIN 35 by the mean of two plastic clamps.

### Recommended tools :

. For control terminal screws : screwdriver, insulated or not, Pozidriv n°1 or plate (4mm wide).  
. For power terminal screws : screwdriver, insulated or not, Pozidriv n°2 or plate (6.5mm wide).  
. For fixing : Pozidriv n°1 or plate (5.5 mm max) screwdriver


### Examples of wiring diagrams :

. Contactor « 2 NO »

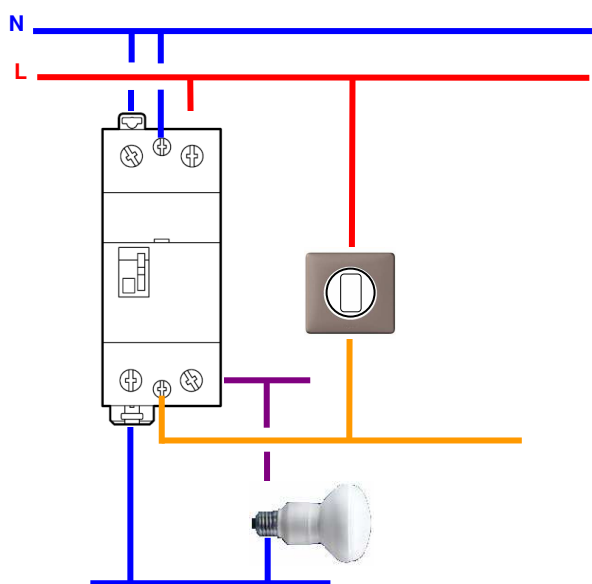


## 4. PREPARATION - CONNECTION (continued)

. Contactor « 3 NO »

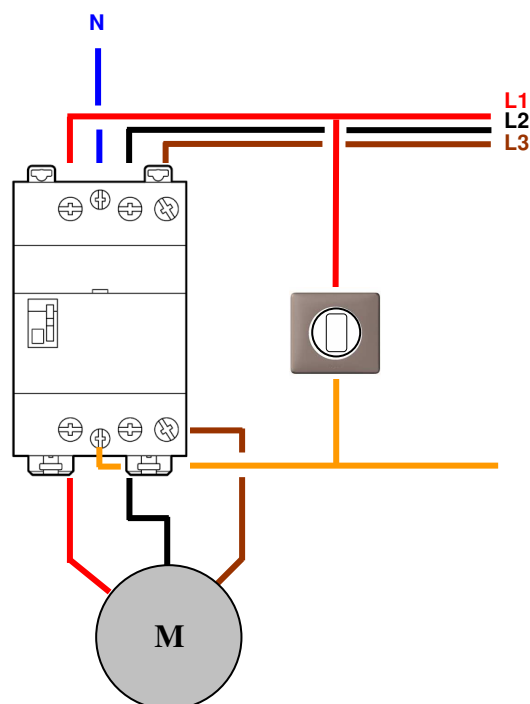

. Contactor « 4 NO »

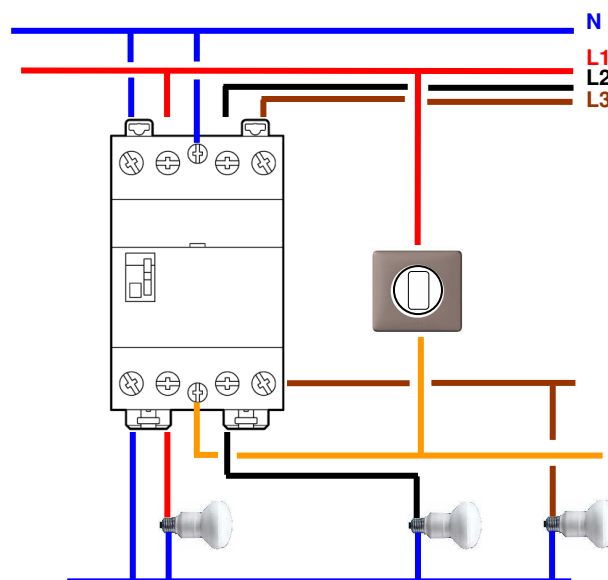

## Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518, 519,  
525 to 528, 530, 531, 537 to 542, 545 to 550, 552 to  
557, 559, 560, 562, 563

### 4. PREPARATION - CONNECTION *(continued)*

#### Connection :

- Control screw terminals :
  - Type of terminal : cage terminals
  - Terminal depth : 12 mm
  - Terminal capacity (h x w) : 4.7 x 4.7 mm
  - Copper cables
- Rigid : 1 x (0.75 to 6 mm<sup>2</sup>) or 2 x (0.75 to 2.5 mm<sup>2</sup>)
- Flexible without ferrule : 1 x (0.75 to 6 mm<sup>2</sup>) or 2 x (0.75 to 2.5 mm<sup>2</sup>)
- Flexible with single ferrule : 1 x (0.75 to 6 mm<sup>2</sup>)
- Flexible with double ferrule : 1 x (0.75 to 4 mm<sup>2</sup>)
- Screw head type: mixed, Posidriv n° 1 and slotted 4 mm
- Type of screw : M3
- Tightening torque : mini = 0.5 Nm / max = 1.2 Nm / recommended = 0.8 Nm
- Power screw terminals :
  - Type of terminal : cage terminals
  - Terminal depth : 14 mm
  - Copper cables
- Rigid : 1 x (0.75 to 25 mm<sup>2</sup>) or 2 x (0.75 to 10 mm<sup>2</sup>)
- Flexible without ferrule : 1 x (0.75 to 25 mm<sup>2</sup>) or 2 x (0.75 to 10 mm<sup>2</sup>)
- Flexible with single ferrule : 1 x (0.75 to 16 mm<sup>2</sup>)
- Flexible with double ferrule : 1 x (0.75 to 16 mm<sup>2</sup>)
- Screw head type: mixed, Posidriv n° 2 and slotted 6.5 mm
- Type of screw : M5
- Tightening torque : mini = 1.3 Nm / max = 3.5 Nm / recommended = 2.5 Nm

#### Length of control lines :

- 24 V contactor : 100 m with 1.5 mm<sup>2</sup> copper wire
- 230 V contactor : 300 m whatever the wire cross-section.

#### Protection degree :

- Terminal ingress protection : IP2x (device connected)
- Front face ingress protection : IP3XD
- Classe II, front face behind a cabinet faceplate
- Protection against mechanical shocks : IK04

#### Shaking resistance :

- No change of contact state during shaking test in accordance with EN 60898 standard

#### actuation :

- By electric remote control (switch)
- By ergonomic 3 position (I, auto, O) handle when contactor is equipped with

#### Display of contacts state :

- By orange indicator when manual or electric control is on
- When contactor is fitted with a handle,
  - Position « I » : permanent control ON
  - Position « O » : permanent control OFF
  - Position « auto » : electric control by switch


#### Labelling :

- Circuit may be labelled by the mean of the label holder on the front face of the latching relay

### 5. GENERAL CHARACTERISTICS

#### Marking :

By permanent ink pad printing :

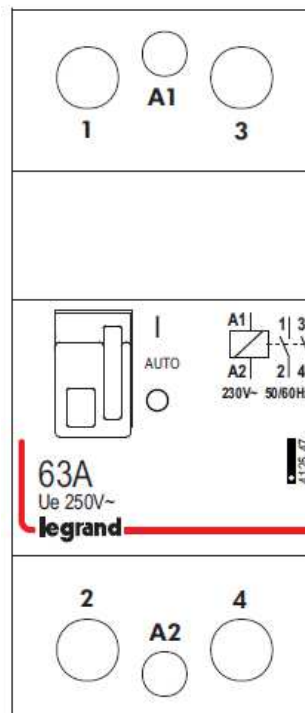

#### Isolation :

- > 3 mm in compliance with EN 61095 standard

#### Isolation rated voltage (Ui) :

- Double pole : 250 V~
- Triple pole / Four pole : 400 V~

#### Pollution degree :

- 2 according to EN 61095 standard

#### Isolation voltage between control and load :

- 4 000 V.

#### Rated impulse withstand voltage (Uimp) :

- 4 kV

#### Distance de sectionnement :

- Supérieure à 3 mm selon norme EN 61095

#### Tension assignée d'isolement (Ui) :

- Bipolaire : 250 V~
- Tri / Tétrapolaire : 400 V~

#### Degré de pollution :

- 2 selon EN 61095

#### Tension d'isolement entre le circuit de commande et le circuit de puissance :

- 4 kV

# Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518, 519, 525 to 528, 530, 531, 537 to 542, 545 to 550, 552 to 557, 559, 560, 562, 563

## 5. GENERAL CHARACTERISTICS (continued)

### Withstand to electromagnetic disturbances (EMC) :

. Schock wave 1,2 / 50  $\mu$ s : class 4 (2 kV between lines, 4 kV between line and earth)

### Influence of altitude :

. no effect up to 2 000 m

### Rated frequency :

. 50 / 60 Hz

### Rated current for each category of use (Ie) :

. Certified according to standards IEC/EN 61095 AC7a / AC7b

Type of contact	AC7a heating		AC7b motors	
	Ie	P	Ie	P
2NO / 2NC	40 A	9 kW	22 A	5.5 kW
3NO / 4NO / 3NO+1NC / 4 NC	40 A	26 kW	22 A	11 kW
2NO / 2NC	63 A	14 kW	30 A	8 kW
3NO / 4NO / 3NO+1NC / 4 NC	63 A	40 kW	30 A	15 kW

. Tested according to standard IEC 60947-4-1 AC1 / AC3

Type of contact	AC1 heating		AC3 motors	
	Ie	P	Ie	P
2NO / 2NC	40 A	9 kW	22 A	5.5 kW
3NO / 4NO / 3NO+1NC / 4 NC	40 A	26 kW	22 A	11 kW
2NO / 2NC	63 A	14 kW	30 A	8 kW
3NO / 4NO / 3NO+1NC / 4 NC	63 A	40 kW	30 A	15 kW

### Operation rated voltage (Ue) :

. Ue = 250 V ~ for double pole  
. Ue = 400 V ~ for triple pole and four pole

### Protection against short-circuits :

. Conditionnal short-circuit current Iq = 3 000 A according to EN 61095 standard  
. Maximum thermal stress : 18 000 A<sup>2</sup>s  
. To protect 40 A and 63 A contactors against short-circuits in accordance with conditionnal current Iq = 3 000 A (EN 61095 standard), we recommend to use a  $\leq$  40 A rated current M.C.B. or gG fuse for a 40 A contactor and a  $\leq$  63 A rated current M.C.B. or gG fuse for a 63A contactor  
. The control circuit must be protected by a circuit breaker in accordance with installation standards

### Control voltage (Uc) :

. Uc = 230 V~ or 24 V~

### Operating control voltage :

. from 0.85 to 1.1 Uc

### Release control voltage :

. from 0.2 to 0.75 Uc

### Control impulse time :

. 100 ms mini

### Rated duty :

. Intermittent duty : 600 operating cycles per hour according to EN 61095 standard (class 600)

### Force by handle operation :

. 500 g for closing and opening operation

### Operation under 400 Hz :

. not possible

## 5. GENERAL CHARACTERISTICS (continued)

### Endurance :

. In number of operating cycles (ON + OFF)

. Control by handle : 1000 operating cycles

. Electrical control :

- 1 000 000 operating cycles with no load
- 100 000 operating cycles at Ie AC-7a in accordance with EN 61095 (same at Ie AC1)
- 30 000 operating cycles at Ie AC-7b in accordance with EN 61095 (same at Ie AC3)

### Use with Direct Current (DC) :

. Control : do not operate with DC

. Power circuit : NO and NC contacts may be used to control loads supplied with DC in accordance with the table of max current below for 63 A contactors

Ue	DC 1 (resistiv load)			DC 3 (motors)		
	number of poles in series			number of poles in series		
	1 p	2 p	3 p	1 p	2 p	3 p
8 V=	63 A	63 A	63 A	54 A	63 A	63 A
12 V=	63 A	63 A	63 A	50 A	63 A	63 A
24 V=	63 A	63 A	63 A	40 A	63 A	63 A
48 V=	53 A	63 A	63 A	20 A	45 A	63 A
110 V=	18 A	40 A	63 A	4 A	16 A	40 A

### Control consumption :

Type of contact	Control voltage	Current in mA (at Un)	
		sustain	inrush
2NO	24 V~	250	1750
4NO		270	1500
2NO	230 V~	130	150
2NC		130	150
3NO+1NC		30	200
3NO / 4NO / 4NC		30	200

Type of contact	Control voltage	Power in W (at Un)
		sustain
2NO	24 V~	1.8
4NO		1.9
2NO	230 V~	0.9
2NC		0.9
3NO+1NC		2.1
3NO / 4NO / 4NC		2.1

# Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518, 519, 525 to 528, 530, 531, 537 to 542, 545 to 550, 552 to 557, 559, 560, 562, 563

## 5. GENERAL CHARACTERISTICS (continued)

### Average dissipated power per contact at 230V :

- 1.8 W per contact of 40 A contactor
- 3.5 W per contact of 63 A contactor

### Annual energy consumption of contactors :

- Loads supplied in 230/400V 50Hz network
- Global energy consumption, control + power contacts, with an « average » use.

Type of contact	Control voltage	in kWh (at Un)
2NO	24 V~	3.1
4NO		4.8
2NO	230 V~	2.4
2NC		2.4
3NO		4.1
3NO+1NC		5
4NC		5
4NO		5

### Noise (holding) :

- Standard contactor ≤ 50 dB at 1 cm and ≤ 30 dB at 1 m
- Noiseless contactor ≤ 32 dB at 1 cm and ≤ 20 dB at 1 m

### Operating temperatures :

- A standard contactor is set to operate at its rated current (40 A or 63 A) in an ambient temperature of + 30°C
- In order to limitate overheating, we recommend to use a spacing element (cat. n° 044 40)

- Every 2 contactors if the ambient temperature ≤ 40°C
- Every contactors if the ambient temperature > 40°C

Depending on ambient temperature, deratings below must be used :

- from - 25°C to + 40°C, no derating
- from + 40°C to + 60°C derating as in table below

Contacteur rated current	40°C	50°C	60°C
I <sub>e</sub> = 40 A	40 A	36 A	32 A
I <sub>e</sub> = 63 A	63 A	57 A	50 A

### Storage temperature :

- from - 40°C up to + 70°C

### Moulded case material :

- Polyamid

### Characteristics of the plastic material :

- Resistance to glow wire test during 30 s according to IEC 695-2-1:
  - Handle : 650°C
  - Other components : 850°C

### Weight :

- 0.240 kg per double pole device
- 0.330 kg per triple pole / four pole device

### Packaged volume :

- 0.4 dm<sup>3</sup> for double pole individually packaged units
- 0.6 dm<sup>3</sup> for triple pole and four pole individually packaged units

## 5. GENERAL CHARACTERISTICS (continued)

### Contactors choice table :

For a life time of 10 years with 200 days of annual use

#### Heating

Maximum power according to the number of operations per day (kW)					
Number of operations per day	≤ 50	75	100	250	500
230 V~ single phase heating	40 A	9	7.5	6	4
	63 A	14	12	9.5	6
400 V~ three phase heating	40 A	26	22	17	8
	63 A	41	35	26	13
Floor heating	40 A	2.5			
	63 A	4			

#### Motors (AC-7b)

Maximum power (kW)		
230 V~ single phase motor	40 A	2.5
	63 A	4
400 V~ three phase motor	40 A	7.5
	63 A	15

#### Lighting

Maximum number of lamps per contact of the contactor in 230 V~ single phase network and 400 V~ three phase and neutral network.  
In 230 V~ three phase network with no neutral, values of the table must be divided by √3.

- Incandescent lamps

Tungsten filament 230 V~ and low voltage halogen				
Unit power	40 W	60 W	75 W	100 W
40 A	96	77	61	48
63 A	154	123	97	77

Tungsten filament 230 V~ and low voltage halogen (continued)				
Unit power	150 W	200 W	500 W	1000 W
40 A	32	24	10	5
63 A	51	38	15	8

Very Low Voltage halogen lamps with ferromagnetic ballast						
Unit power	20 W	35 W	50 W	75 W	100 W	150 W
40 A	68	39	31	21	16	10
63 A	88	51	41	27	20	14

Very Low Voltage halogen lamps with electronic ballast						
Unit power	20 W	35 W	50 W	75 W	100 W	150 W
40 A	112	70	56	36	28	18
63 A	157	98	78	51	39	25

# Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518, 519, 525 to 528, 530, 531, 537 to 542, 545 to 550, 552 to 557, 559, 560, 562, 563

## 5. GENERAL CHARACTERISTICS (continued)

- Fluorescent lamps with ferromagnetic ballast

Single parallel compensated					
Unit power	18 W	20 W	36 W	58 W	115 W
40 A	43	39	33	22	12
63 A	56	51	42	29	15

Twin serial compensated					
Unit power	2 x 20 W	2 x 36 W	2 x 40 W	2 x 58 W	2 x 140
40 A	68	57	53	36	15
63 A	101	86	79	54	23

Four serial compensated		4 x 18 W
Unit power		
40 A		36
63 A		54

Compact with integrated starter				
Unit power	7 W	10 W	18 W	26 W
40 A	78	65	55	36
63 A	101	85	71	47

- Fluorescent lamps with electronic ballast

Single				
Unit power	18 W	30 W	36 W	58 W
40 A	165	102	87	54
63 A	248	153	131	81

Twin			
Unit power	2 x 18 W	2 x 36 W	2 x 58 W
40 A	84	45	29
63 A	126	68	43

Triple serial compensated		
Unit power	3 x 14 W	3 x 18 W
40 A	62	51
63 A	84	69

Four serial compensated		
Unit power	4 x 14 W	4 x 18 W
40 A	52	39
63 A	73	55

With integrated electronic supply					
Unit power	7 W	11 W	15 W	20 W	23 W
40 A	280	175	126	98	84
63 A	392	245	176	137	118

## 5. GENERAL CHARACTERISTICS (continued)

- Discharge lamps with compensator

Metal halide						
Unit power	35 W	70 W	100 W	150 W	250 W	400 W
40 A	23	14	11	8	5	3
63 A	34	20	16	11	7	5

Low pressure sodium						
Unit power	18 W	35 W	55 W	90 W	135 W	180 W
40 A	30	15	11	8	5	5
63 A	45	23	16	11	7	7

High pressure sodium					
Unit power	70 W	150 W	250 W	400 W	1000 W
40 A	15	14	9	6	3
63 A	23	20	14	9	5

High pressure mercury					
Unit power	50 W	80 W	125 W	250 W	400 W
40 A	21	14	11	6	4
63 A	29	20	16	8	6

Mixed high pressure				
Unit power	100 W	160 W	250 W	400 W
40 A	14	9	7	4
63 A	19	12	8	5

- Led lamps

Led lamps number without driver or not dimmable										
In (A)	2W	5W	7W	9W	12 W	18 W	22 W	30 W	40 W	50 W
40A	90	90	85	85	85	80	75	62	50	37
63A	150	150	140	140	140	115	100	80	70	55

Led lamps number with driver or dimmable										
In (A)	2W	5W	7W	9W	12 W	18 W	22 W	30 W	40 W	50 W
40A	170	170	170	162	162	129 0	113	95	77	65
63A	265	265	265	260	260	214	176	139	121	105

## Power contactors 40 A and 63 A with or without handle

Cat. N°(s) : 412 506, 507, 511, 512, 515, 516, 518, 519,  
525 to 528, 530, 531, 537 to 542, 545 to 550, 552 to  
557, 559, 560, 562, 563

### 6. CONFORMITIES AND APPROVALS

**Compliance :**

. EN 61095 / NFC 61-480 – IEC 61095

**Certificates :**

. NF (France)  
. VDE (Germany)  
. GOST (Russia)

**Tropicalization :**

. execution 2 (all climates) according to U.T.E. C 63-100 guide

**Environment :**

. complying with RoHS  
. without halogen

### 7. AUXILIARIES

**Auxiliaries :**

. Signalling change-over switch NO+NC auxiliary cat. n° 412431.  
. Used to indicate the position status of the contacts of the product  
with which it is associated.

**Association of the auxiliaries :**

. Auxiliaries are fitted on left hand side of contactor  
. Maximum of 1 change-over switch auxiliary per contactor