

# RM699B



## miniature relays

version (V)



version (H)



- Cover width only 5 mm
- Sealed for soldering and cleaning
- **Terminals arrangement: vertical version (V) and horizontal version (H)**
- Applications: for PLC's, industrial machinery, time relays, counters, temperature adjusters, measurement instruments, office equipment, etc.
- Recognitions, certifications, directives: RoHS,  

### Contact data

Number and type of contacts	1 CO, 1 NO	
Contact material	<b>AgSnO<sub>2</sub>, AgNi</b>	AgSnO <sub>2</sub> /Au hard gold plating ❶ AgNi/Au hard gold plating ❶
Max. switching voltage	400 V AC / 250 V DC	30 V AC / 36 V DC ❶
Min. switching voltage	10 V	5 V
Rated load (capacity)	AC1 AC15 DC1 DC13	0,05 A / 30 V AC ❶ — 0,05 A / 36 V DC ❶ —
Motor load	acc. to UL 508 AC3 acc. to IEC 60947-4-1	— —
Min. switching current	100 mA —	10 mA 1 mA 24 V
Max. make current	10 A 20 ms	0,1 A 20 ms ❶
Rated current	6 A	0,05 A ❶
Max. breaking capacity	AC1	1,2 VA ❶
Min. breaking capacity		0,05 W
Contact resistance		≤ 30 mΩ 10 mA, 5 V
Max. operating frequency	• at rated load AC1 • no load	360 cycles/hour 72 000 cycles/hour

### Coil data

Rated voltage	DC	5, 6, 9, 12, 24, 48, 60 V
Must release voltage		DC: ≥ 0,05 U <sub>n</sub>
Range of supply voltage		see Table 1
Rated power consumption	DC	0,17 W 5 ... 24 V      0,21 W 48, 60 V

### Insulation according to EN 60664-1


Insulation rated voltage	250 V AC	
Rated surge voltage	6 000 V 1,2 / 50 μs	
Overvoltage category	III	
Dielectric strength	• between coil and contacts • contact clearance	4 000 V AC      type of insulation: reinforced 1 000 V AC      type of clearance: micro-disconnection
Contact - coil distance	• clearance	≥ 6 mm
	• creepage	≥ 8 mm

### General data


Operating / release time (typical values)	8 ms / 4 ms	
Electrical life (number of cycles)		
• resistive AC1	the NO and NC contact loaded (bilateral load): see Fig. 1 the NO contact loaded: > 3 x 10 <sup>4</sup> 6 A, 250 V AC	
• inductive AC3	6 x 10 <sup>3</sup> 186 W (single-phase motor), AgNi	
Mechanical life (cycles)	> 10 <sup>7</sup>	
Dimensions (L x W x H)	28 x 5 x 15 mm	
Weight	5 g	
Ambient temperature	• storage (non-condensation and/or icing)	-40...+85 °C -40...+85 °C
Cover protection category	IP 67	EN 60529
Environmental protection	RTIII	EN 61810-1
Relative humidity	5...85%	
Shock resistance	5 g	
Vibration resistance	5 g 10...55 Hz	
Solder bath temperature	max. 260 °C	
Soldering time	max. 5 s	

The data in bold type relate to the standard versions of the relays. ❶ For gold-plated contacts - when the maximum values given have been exceeded, the gold layer is destroyed. Then, the advantages of gold-plating disappear and the values are as for AgSnO<sub>2</sub>, AgNi contacts (see beside), and electrical life of these contacts may be shorter than of normal contacts. ❷ Contact 1 NO, single-phase motor.


## Dimensions

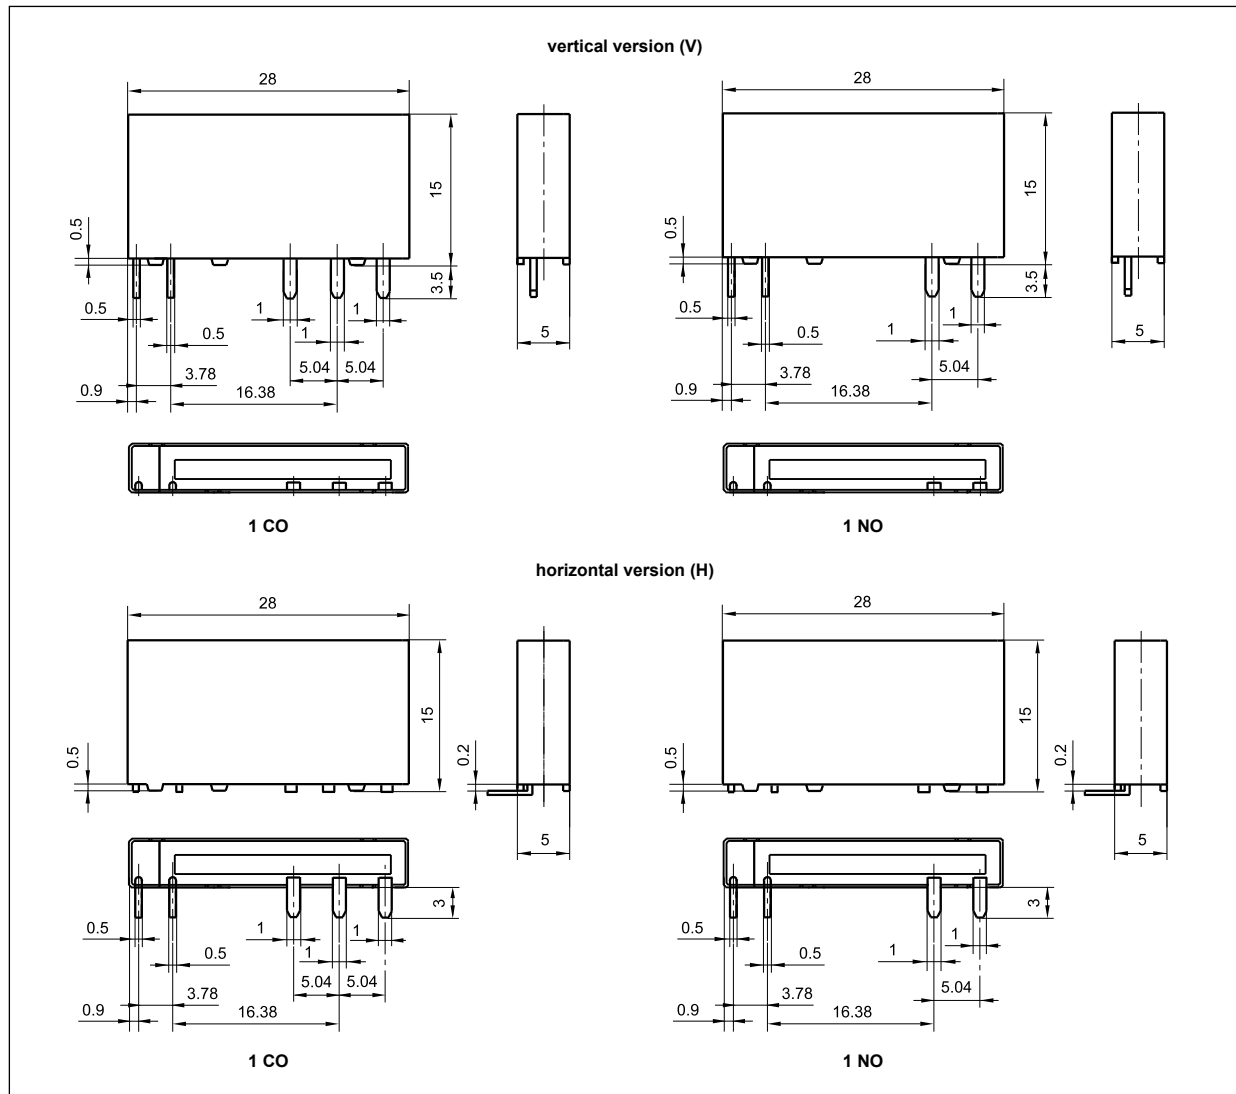

## Pinout (solder side view)

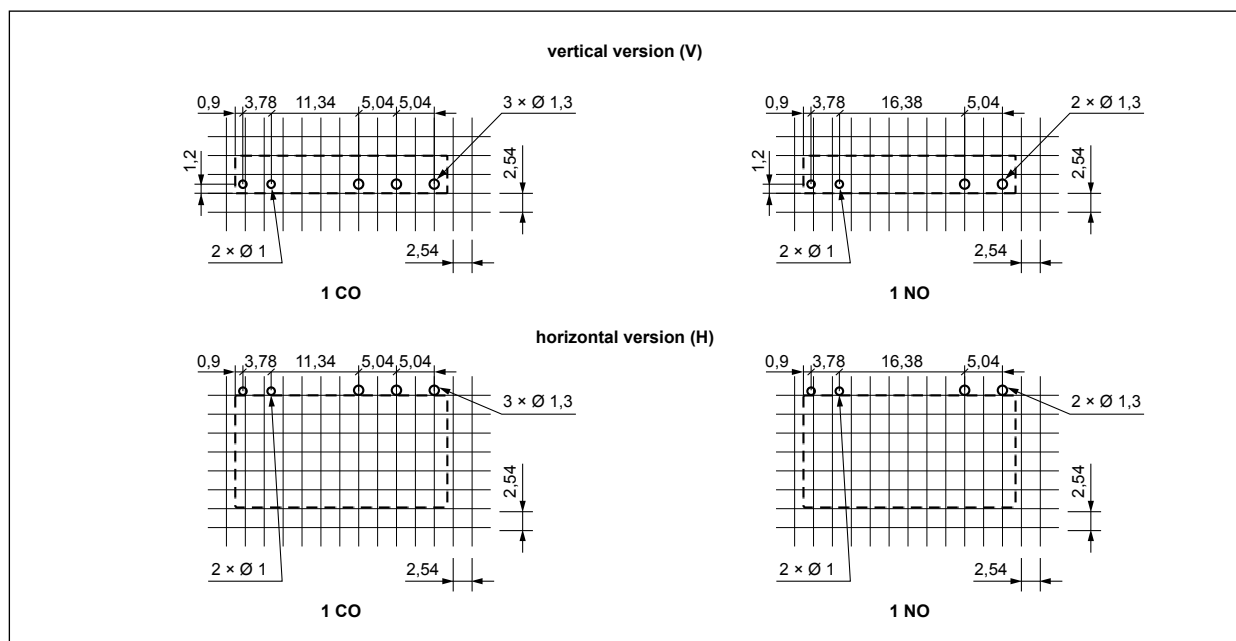


## Connection diagrams (pin side view)

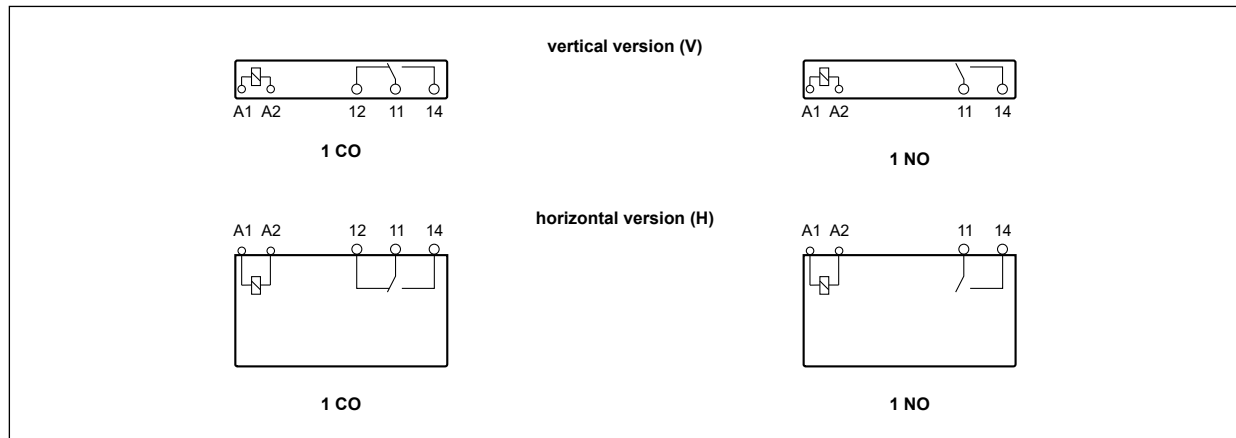


**Electrical life at AC resistive current.**  
Switching frequency: 360 cycles/hour

Fig. 1

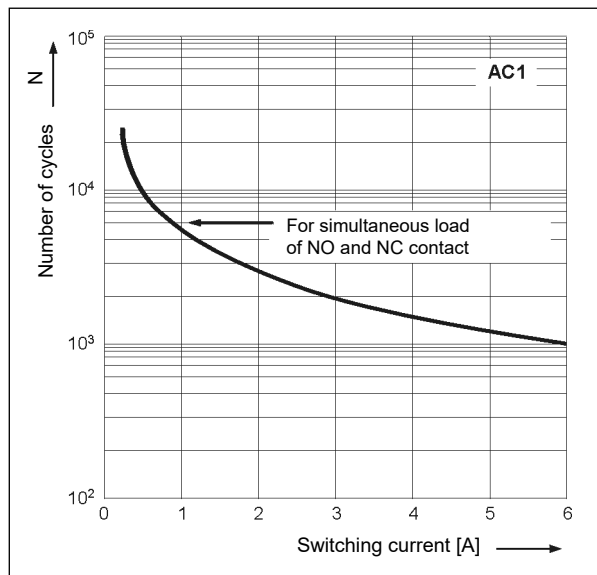

**Max. DC resistive load breaking capacity**

Fig. 2

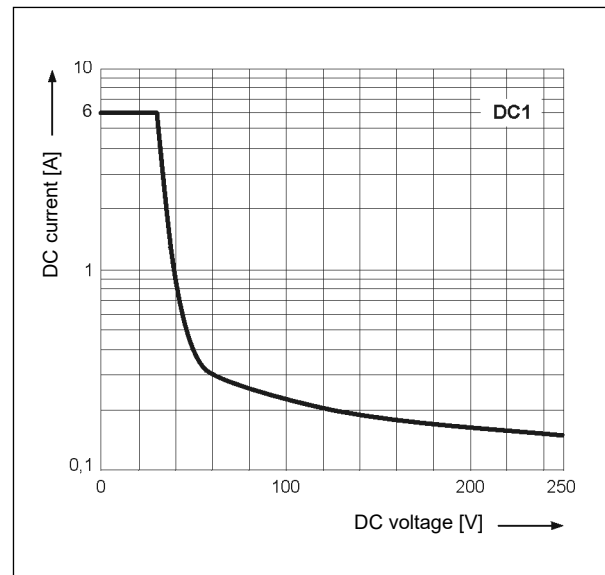

## Mounting

Relays **RM699B horizontal version (H)** are designed for direct PCB mounting.

Relays **RM699B vertical version (V)** are designed for: • direct PCB mounting • plug-in sockets.

Sockets for RM699BV	Accessories		
	Description plates	Interconnection strips	Separators
<b>Screw terminals sockets, 35 mm rail mount (EN 60715)</b>			
PI6W ⑤	PI6W-1246	ZG20 ⑤	—
6W ⑤	MP6-C ④	JB20 ⑤	6W-SEP
<b>Spring terminals sockets, 35 mm rail mount (EN 60715)</b>			
PI6WB ⑤	PI6W-1246	ZG20 ⑤	—
6WB ⑤	MP6-C ④	JB20 ⑤	6W-SEP
<b>Sockets for PCB</b>			
GD699	MP6-C ④	—	—

⑤ Sockets with electronic PI6W., 6W.: version codes and selection of relays for sockets can be found in the data sheets of interface relays PIR6W., SIR6W. - see [www.repol.com.pl](http://www.repol.com.pl) ④ Cards MP6-C: for automatic printing, containing 64 description plates. ⑤ Colours of strips: ZG20-1, JB20-1 red; ZG20-2, JB20-2 black; ZG20-3, JB20-3 blue.

# RM699B

## miniature relays


Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C $\Omega$	Acceptable resistance	Coil range V DC ⑥	
				min. (at 20 °C)	max. (at 20 °C)
1005	5	147	$\pm 10\%$	3,75	7,5
1006	6	212	$\pm 10\%$	4,5	9,0
1009	9	476	$\pm 10\%$	6,75	13,0
1012	12	848	$\pm 10\%$	9,0	18,0
1024	24	3 390	$\pm 15\%$	18,0	36,0
1048	48 ⑦	10 600	$\pm 15\%$	36,0	72,0
1060	60 ⑦	16 600	$\pm 15\%$	45,0	90,0

⑥ The maximum value of the supply voltage is the value that may occur on the coil of the relay for a short while. Permanent supply of RM699B relay with the maximum voltage may damage the relay coil. ⑦ For relays with the rated voltage of coils 48 V DC and 60 V DC, it is necessary to stabilize the supply voltage at the level of the rated voltage in order to protect the coils of relays from damage.

### Ordering codes

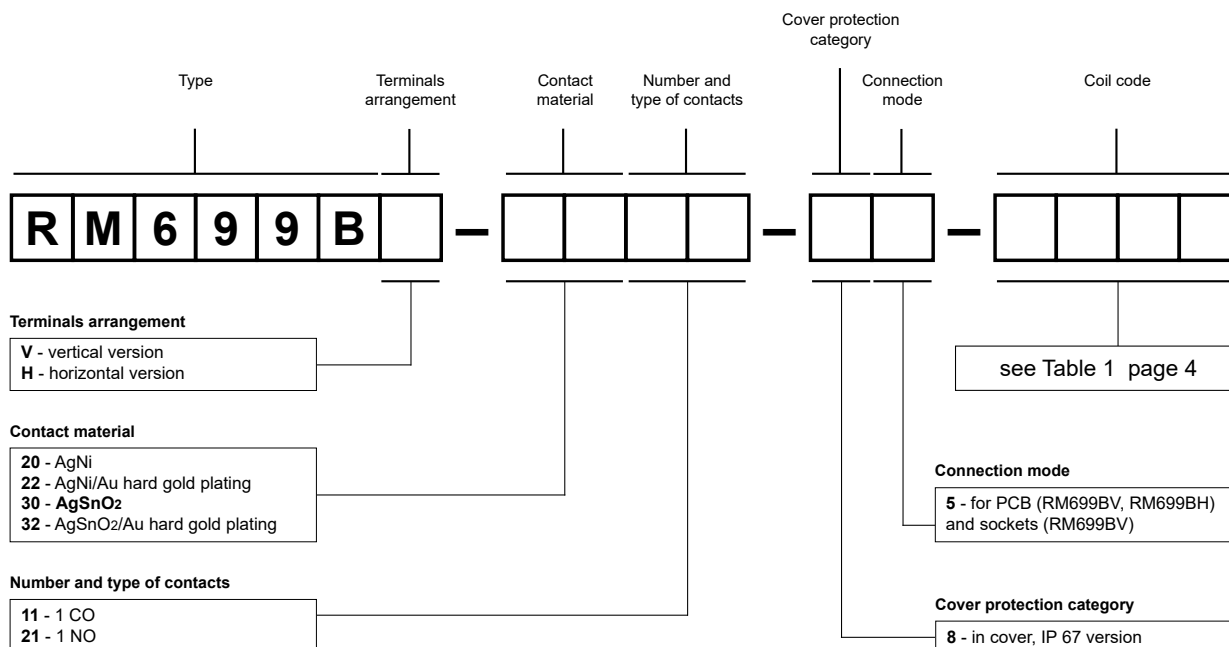

Examples of ordering code:

**RM699BV-3011-85-1012**


relay **RM699B**, vertical version, for PCB and sockets, one changeover contact, contact material AgSnO<sub>2</sub>, coil voltage 12 V DC, in cover IP 67

**RM699BH-2021-85-1005**

relay **RM699B**, horizontal version, for PCB, one normally open contact, contact material AgNi, coil voltage 5 V DC, in cover IP 67

### GD699

Plug-in sockets for PCB  
for RM699BV, RSR30  
- see page 7

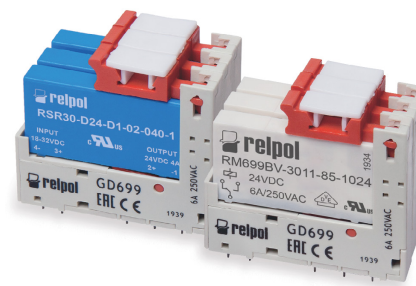


## Sockets and accessories


### PI6W-1P ①

For RM699BV, RSR30


Screw terminals  
Max. tightening moment  
for the terminal: 0,3 Nm  
35 mm rail mount  
acc. to EN 60715  
98,5 x 6,2 x 85,5 mm  
One pole  
6 A, 250 V AC



### Connection diagram

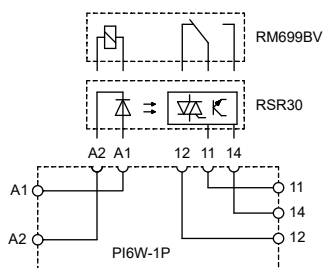

### Dimensions

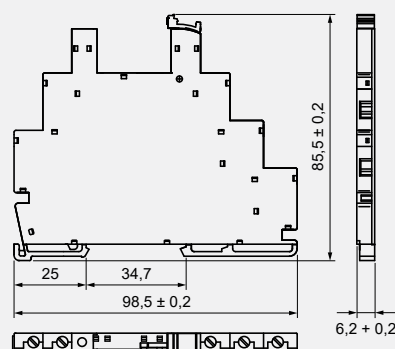

### Accessories ③


ZG20

PI6W-1246


### PI6W-1P ②

For RM699BV


Screw terminals  
Max. tightening moment  
for the terminal: 0,3 Nm  
35 mm rail mount  
acc. to EN 60715  
98,5 x 6,2 x 85,5 mm  
One pole  
6 A, 250 V AC



### Connection diagram



### Dimensions

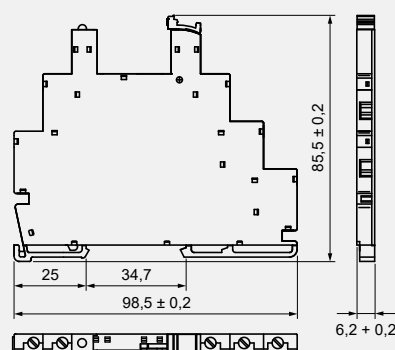

### Accessories ③


ZG20

PI6W-1246


### PI6W-1PS ②

For RM699BV, RSR30

Screw terminals  
Max. tightening moment  
for the terminal: 0,3 Nm  
35 mm rail mount  
acc. to EN 60715  
98,5 x 6,2 x 85,5 mm  
One pole  
6 A, 250 V AC



### Connection diagram



### Dimensions



### Accessories ③


ZG20

PI6W-1246


### PI6WB-1PS ②

For RM699BV, RSR30


Spring terminals  
35 mm rail mount  
acc. to EN 60715  
98,3 x 6,2 x 84,6 mm  
One pole  
6 A, 250 V AC



### Connection diagram



### Dimensions

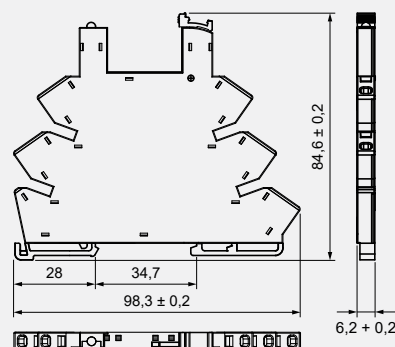

### Accessories ③

ZG20

PI6W-1246

① Sockets without electronic. ② Sockets with electronic PI6W., 6W.: version codes and selection of relays for sockets can be found in the data sheets of interface relays PIR6W., SIR6W. - see [www.repol.com.pl](http://www.repol.com.pl) ③ Colours of strips: ZG20-1, JB20-1 red; ZG20-2, JB20-2 black; ZG20-3, JB20-3 blue.


## Sockets and accessories

### 6W

For RM699BV, RSR30


Screw terminals; Max. cross section of the cables:  
1 x 2,5 mm<sup>2</sup> / 2 x 1,5 mm<sup>2</sup>  
Stripping length: 7 mm  
Max. tightening moment for the terminal: 0,5 Nm

35 mm rail mount acc. to EN 60715  
88,6 x 6,2 x 76 mm  
One pole  
6 A, 250 V AC



#### Accessories

#### Connection diagram




MP6-C

JB20



6W-SEP

#### Dimensions

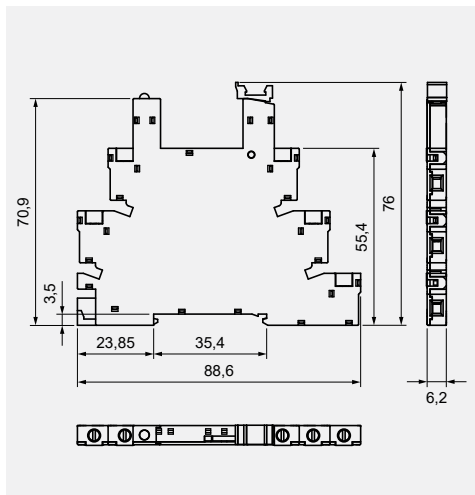


### 6WB

For RM699BV, RSR30


Spring terminals  
Max. cross section of the cables: 1 x 2,5 mm<sup>2</sup>  
Stripping length: 7 mm

35 mm rail mount acc. to EN 60715  
95 x 6,2 x 76,6 mm  
One pole  
6 A, 250 V AC



#### Accessories

#### Connection diagram




MP6-C

JB20



6W-SEP

#### Dimensions

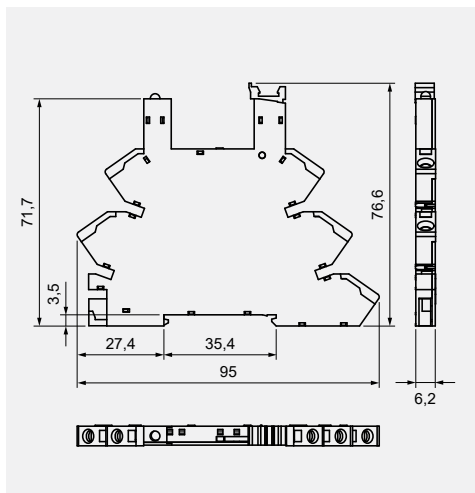

② Sockets with electronic PI6W., 6W.: version codes and selection of relays for sockets can be found in the data sheets of interface relays PIR6W., SIR6W.  
- see [www.relpol.com.pl](http://www.relpol.com.pl) ③ Colours of strips: ZG20-1, JB20-1 red; ZG20-2, JB20-2 black; ZG20-3, JB20-3 blue.

## Sockets and accessories

### GD699

For RM699BV, RSR30

For PCB



33 x 6 x 37,21 mm

One pole, 5 mm pinout  
6 A, 250 V AC




Accessories

### Pinout




MP6-C

### Dimensions

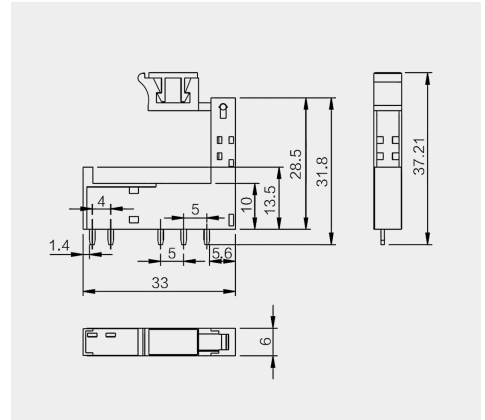


## Mounting and sub-assemblies of the relay and accessories in the socket

Solid state relay




Electromagnetic relay



Plug-in socket for PCB



Description plate



Removing the relay from the socket  
with a retractor / retractor clip

### PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.