



F&F Filipowski L.P.
Konstantynowska 79/81, 95-200 Pabianice, POLAND
phone/fax (+48 42) 215 23 83 / (+48 42) 227 09 71
www.fif.com.pl; e-mail: biuro@fif.com.pl

LK-701Y

Indicator lamp
(1× yellow)



Do not dispose of this device in the trash along with other waste!

According to the Law on Waste, electro coming from households free of charge and can give any amount to up to that end point of collection, as well as to store the occasion of the purchase of new equipment (in accordance with the principle of old-for-new, regardless of brand). Electro thrown in the trash or abandoned in nature, pose a threat to the environment and human health.



Purpose

The LK-701Y indicator lamp is used to visually signal the presence of voltage in an electrical circuit. The small size of the housing (width 6.2 mm) allows space-saving installation in the switchgear.

Functioning

The presence of voltage in the circuit is indicated by the yellow LED lighting up.




Where an overcurrent fuse equal to or greater than 25 A is installed upstream of the lamp connection point, the lamp connection circuit must be fused with a fuse no greater than 6 A.

Mounting

1. Check input signal.
2. Disconnect the power supply.
3. Fix the light on the rail.
4. Connect according to the diagram.
5. Switch on the power supply.
6. Check for correct operation.

Wiring diagram

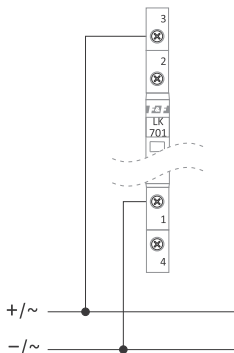

Technical data

power supply	230 V+N
rated current	<1 mA
power indication	1× LED (yellow)
power consumption	<0.15 W
working temperature	-30÷50°C
terminal	2.5 mm ² screw terminals
tightening torque	0.4 Nm
dimensions	1/3 module (6.2 mm)
mounting	on TH-35 rail
ingress protection	IP20

Warranty

F&F products are covered by a 24-month warranty from the date of purchase. The warranty is only valid with proof of purchase. Contact your dealer or contact us directly.

CE declaration

F&F Filipowski L.P. declares that the device is in conformity with the essential requirements of the Low Voltage Directive (LVD) 2014/35/EU and the Electromagnetic Compatibility (EMC) Directive 2014/30/UE.

The CE Declaration of Conformity, along with the references to the standards in relation to which conformity is declared, can be found at www.fif.com.pl from the product subpage.

