

MR-EU1W1P

monitoring relays



- **Multifunctions monitoring relays (DC and AC voltage monitoring in 1-phase network, with adjustable thresholds)**
- Minimum value monitoring with the hysteresis mode
- Supply voltage = monitoring voltage
- Output: 1 CO (1 changeover contact)
- Cover - modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Recognitions, certifications, directives: RoHS,

Output circuit - contact data

Number and type of contacts	1 CO
Rated voltage	250 V AC
Max. breaking capacity	AC1 1 250 VA (5 A / 250 V AC)
Max. operating frequency	3 600 cycles/hour
• at resistive load 100 VA	360 cycles/hour
• at resistive load 1 000 VA	

Input circuit

Supply voltage	= monitoring voltage
Rated voltage	AC 24, 230 V
DC	24 V
Must release voltage	determined by undervoltage detection (see measured circuit)
Operating range of supply voltage	0,75...1,2 U _n
Rated power consumption	AC 230 V AC: 10,0 VA / 0,6 W
DC	24 V AC: 1,3 VA / 0,8 W 24 V DC: 0,6 W
Range of supply frequency	AC 48...63 Hz
Duty cycle	100%
Measuring circuit	• measured value
	• measuring inputs
	DC or AC sinus, 48...63 Hz
	= supply voltage
	AC: 230 V terminals E-F3
	AC: 24 V terminals E-F2
	DC: 24 V terminals E-F1
	≥ 1,2 U _n
• overload capacity	MIN: 0,75...1,15 U _n MAX: 0,8...1,2 U _n
• switching thresholds	see printing on the unit
• hysteresis H	

Insulation according to EN 60664-1

Rated surge voltage	4 000 V 1,2 / 50 μs
Overvoltage category	III
Insulation pollution degree	2 if built-in: 3

General data

Electrical life	• resistive AC1	> 2 x 10 ⁵ 1 000 VA
Mechanical life (cycles)		> 2 x 10 ⁷
Dimensions (L x W x H)		87 x 17,5 x 65 mm
Weight		72 g
Ambient temperature	• storage	-25...+70 °C
(non-condensation and/or icing)	• operating	-25...+55 °C
Cover protection category		IP 20 EN 60529
Relative humidity		15...85%
Shock resistance		15 g 11 ms
Vibration resistance		0,35 mm DA 10...55 Hz

Measuring circuit data

Functions	UNDER, WIN minimum value monitoring with the hysteresis mode
Base accuracy	± 5% (calculated from the final range values)
Setting accuracy	± 5% (calculated from the final range values)
Repeatability	± 2%
Temperature influence	± 1% / °C
Recovery time	500 ms
LED indicator	green LED U ON - indication of supply voltage U red LEDs MIN and MAX ON/OFF - indication of failure yellow LED R ON/OFF - output relay status

Indication of relay status - according to the set threshold.


04.12.2025

MR-EU1W1P

monitoring relays


Functions

UNDER - Undervoltage monitoring.

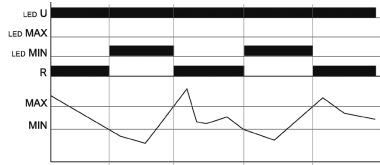

When the supply voltage U is applied, the output relay R switches into on-position, if the measured voltage is beyond the MIN-value. When the measured voltage falls below the MIN-value, the output relay R switches into off-position. The output relay R switches into on-position again, if the voltage exceeds the MAX-value.


WIN - Voltage monitoring in windowfunction between MIN and MAX values.

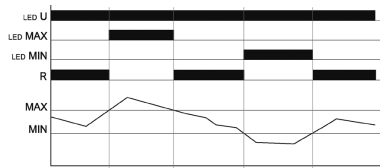


When the supply voltage U is applied, the output relay R switches into on-position, if the measured voltage is within the adjusted window. When the measured voltage left the window between MIN and MAX, the output relay R switches into off-position. The output relay R switches into on-position again, if the voltage re-enter the adjusted window.

U - supply voltage; R - output state of the relay; MIN, MAX - relay status


Front panel description

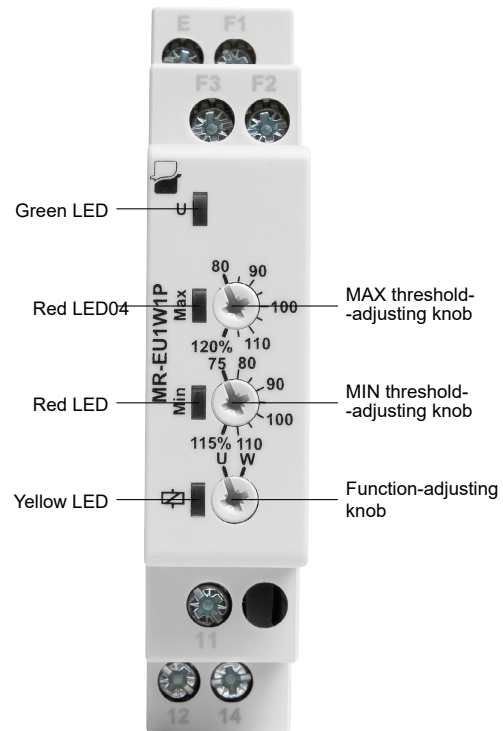

Dimensions

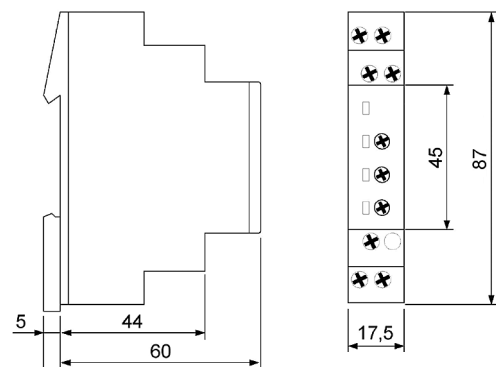


Connection diagrams

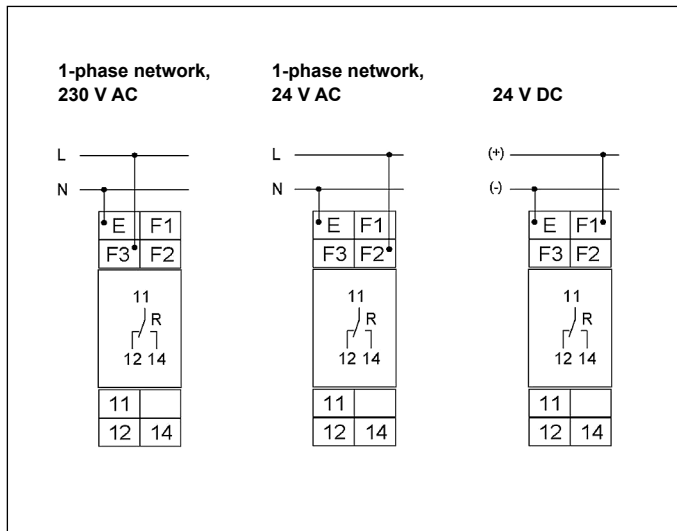

Mounting

Relays **MR-EU1W1P** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Terminals - cross section of the connection cables:** 1 x 0,5 ... 2,5 mm² with/without multicore cable end, 1 x 4 mm² without multicore cable end, 2 x 0,5 ... 1,5 mm² with/without multicore cable end, 2 x 2,5 mm² flexible without multicore cable end.

Ordering codes

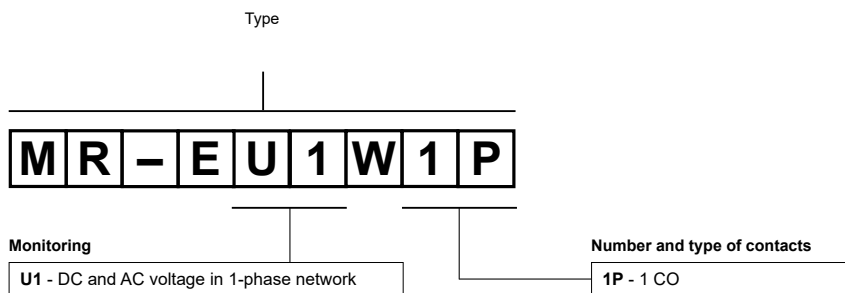

Example of ordering code:

MR-EU1W1P monitoring relay **MR-EU1W1P**, multifunction (relay perform 2 functions), cover - modular, width 17,5 mm, one changeover contact, rated monitoring voltages: AC - 230 V, 24 V; DC - 24 V

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.