

Technical data sheet

Combination arrester, 1-pole

Item number: 5096849



Combination arrester, type 1+2, for use in TN and TT networks

- Lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole and up to 150 kA (10/350) in total
- Protection level < 1.7 kV allows device protection
- Short-circuit resistance 10 kA, arrester backup fuse to 500 A gL/gG
- Encapsulated, non-extinguishing spark gaps

Application: Industrial systems and buildings with external lightning protection of the highest class I to IV.



Master data		
Item number	5096849	
Type	MCD 50-B	
Description 1	CoordinatedLightningController	
Manufacturer	OBO	
Dimension	255V	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	34.4 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	2,0091 kg CO2e / 1 Piece	


Technical data sheet

Combination arrester, 1-pole



Item number: 5096849

Dimensions

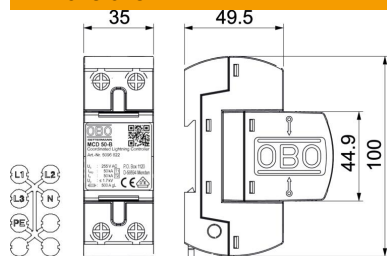

Length	100 mm
Width	35 mm
Height	69 mm

Technical data



Arrester surge current (8/20 µs) [total]	50 kA
Response time	<100 ns
Blow-out	no
Version for	1-pole complete; 255 V
Pole version	1
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 µs)	50 kA
Lightning surge current (10/350)	50 kA
Remote signalling	no
Follow current quenching capacity I _{eff}	10 kA
Maximum continuous voltage AC	255 V
Short-circuit resistance	10 kA
Short-circuit resistance for max. mains-side overcurrent protection	10 kA
Conductor cross-section, rigid (single-wire/multiwire), max.	50 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 mm ²
Lightning protection zone LPZ	0→2
Humidity, min.	5 %
Humidity, max.	95 %
Max. mains-side overcurrent protection	500
Maximum back-up fuse	500 A
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	50 kA
Nominal discharge current (8/20 µs) [L-N]	50 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	TN
DC network form	no
IT network form	no
Other network form	no
TN network form	yes
TN-C network form	yes
TN-C-S network form	yes

Technical data sheet

Combination arrester, 1-pole



Item number: 5096849

Technical data



TN-S network form	yes
TT network form	yes
OBO_Nominal load current (input/output terminal)	125 A
Pole number	1
Test class, type 1	yes
Test class, type 2	yes
Protection rating	IP20
Protection level	≤1,7 kV
Protection level [L-N]	≤1,7
Signalling on device	None
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II
Permitted temperature range, max.	85 °C
Permitted temperature range, min.	-40 °C
Approvals	VDE