



Niloé™ STEP Cover plates

Cat. No(s): 3 980 91/92/93 - 3 981 95 - 3 982 71/72/73/74/75/76/77/78/79/80/81/82/87/88/89/90/91/92/93 -
3 983 41/42/43/71/72/73/74/75/91/92/93 - 3 985 95 - 8 630 91/92/93/94/95
- 8 631 91/92/93/94/95 - 8 632 91/92/93/94/95 - 8 633 91/92/93/94/95 - 8 634 91/92/93/94/95
- 8 635 91/92/93/94/95 - 8 636 91/92/93/94/95 - 8 637 91/92/93/94/95 - 8 638 91/92/93/94/95
- 8 639 91/92/93/94/95 - 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75 - 8 645 61/71/72/73/74/75
- 8 646 61/71/72/73/74/75 - 8 647 71/72/73 - 8 648 71/72/73/74



8 63X 91




8 63X 92

1. USE


Faceplates for Niloé Step from 1 to 5 gangs wiring accessories.
Available in several colors.

2. RANGE

1-gang plates with labelholder

| | | |
|--|-----------|----------|
|  | White | 8 641 61 |
| | Aluminium | 8 643 61 |
| | Black | 8 645 61 |
| | Sand | 8 646 61 |


1-gang plates

| | | |
|---|---------------------|------------------------------|
|  | Atoll | 3 980 91, 8 630 91 |
| | White | 3 982 71, 8 631 91, 8 641 71 |
| | Old pink | 3 983 41, 8 632 91 |
| | Aluminium | 3 982 79, 8 633 91, 8 643 71 |
| | Medium grey | 3 983 71, 8 634 91 |
| | Black | 3 982 75, 8 635 91, 8 645 71 |
| | Pearl | 8 636 91 |
| | Dark grey | 3 983 91, 8 637 91 |
| | Brushed aluminium | 3 982 87, 8 638 91, 8 648 71 |
| | Brushed medium grey | 8 639 91 |
| | Sand | 8 646 71 |
| | Copper | 3 982 91, 8 647 71 |

2. RANGE (continued)


2-gang plates

71 mm spacing - horizontal and vertical


| | | |
|---|---------------------|------------------------------|
|  | Atoll | 3 980 92, 8 630 92 |
| | White | 3 982 72, 8 631 92, 8 641 72 |
| | Old pink | 3 983 42, 8 632 92 |
| | Aluminium | 3 982 80, 8 633 92, 8 643 72 |
| | Medium grey | 3 983 72, 8 634 92 |
| | Black | 3 982 76, 8 635 92, 8 645 72 |
| | Pearl | 8 636 92 |
| | Dark grey | 3 983 92, 8 637 92 |
| | Brushed aluminium | 3 982 88, 8 638 92, 8 648 72 |
| | Brushed medium grey | 8 639 92 |
| | Sand | 8 646 72 |
| | Copper | 3 982 92, 8 647 72 |


3-gang plates

71 mm spacing - horizontal and vertical

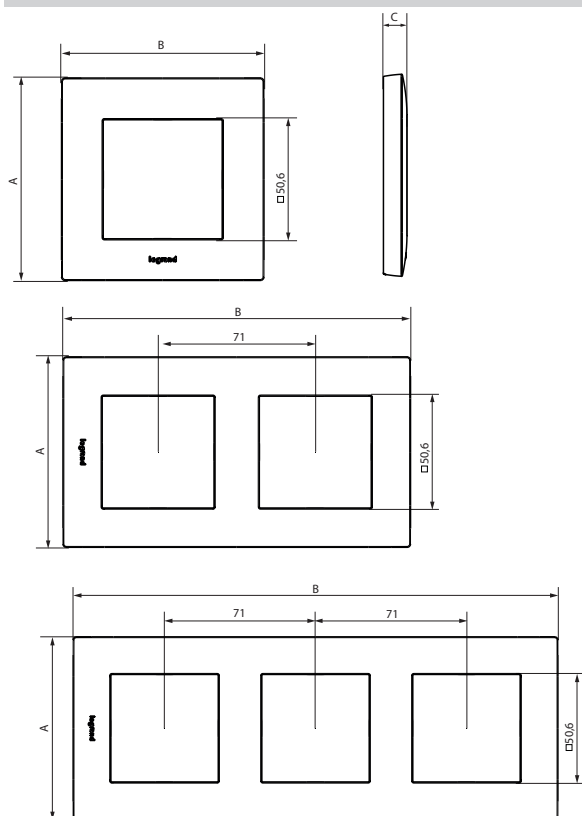
| | | |
|--|---------------------|------------------------------|
|  | Atoll | 3 980 93, 8 630 93 |
| | White | 3 982 73, 8 631 93, 8 641 73 |
| | Old pink | 3 983 43, 8 632 93 |
| | Aluminium | 3 982 81, 8 633 93, 8 643 73 |
| | Medium grey | 3 983 73, 8 634 93 |
| | Black | 3 982 77, 8 635 93, 8 645 73 |
| | Pearl | 8 636 93 |
| | Dark grey | 3 983 93, 8 637 93 |
| | Brushed aluminium | 3 982 89, 8 638 93, 8 648 73 |
| | Brushed medium grey | 8 639 93 |
| | Sand | 8 646 73 |
| | Copper | 3 982 93, 8 647 73 |

2. RANGE (continued)

| 4-gang plates 71 mm spacing - horizontal and vertical | | |
|---|---------------------|---------------------------------|
|  | Atoll | 8 630 94 |
| | White | 3 982 74, 8 631 94, 8 641 74 |
| | Old pink | 8 632 94 |
| | Aluminium | 3 982 82, 8 633 94, 8 643 74 |
| | Medium grey | 3 983 74, 8 634 94 |
| | Black | 3 982 78, 8 635 94, 8 645 74 |
| | Pearl | 8 636 94 |
| | Dark grey | 8 637 94 |
| | Brushed aluminium | 3 982 90, 8 638 94, 8 648 74 |
| | Brushed medium grey | 8 639 94 |
| | Sand | 8 646 74 |

| 5-gang plates 71 mm spacing - horizontal and vertical | | |
|--|---------------------|---------------------------------|
|  | Atoll | 8 630 95 |
| | White | 3 981 95, 8 631 95, 8 641 75 |
| | Old pink | 8 632 95 |
| | Aluminium | 8 633 95, 8 643 75 |
| | Medium grey | 3 983 75, 8 634 95 |
| | Black | 3 985 95, 8 635 95, 8 645 75 |
| | Pearl | 8 636 95 |
| | Dark grey | 8 637 95 |
| | Brushed aluminium | 8 638 95 |
| | Brushed medium grey | 8 639 95 |
| | Sand | 8 646 75 |

3. OVERALL DIMENSIONS (mm)



| | A | B | C |
|--------------------------------|----|-----|----|
| 1-gang | 86 | 86 | 10 |
| 2-gang 71 mm fixing centres | 86 | 157 | 10 |
| 3-gang 71 mm fixing centres | 86 | 228 | 10 |
| 4-gang 71 mm fixing centres | 86 | 299 | 10 |
| 5-gang 71 mm fixing centres | 86 | 370 | 10 |

4. TECHNICAL CHARACTERISTICS

4.1 Materials

Mat surface appearance

Material: - ABS plate
- Halogen-free
- UV resistant

Self-extinguishing:

+ 850°C/30 s for insulating parts holding live parts in place
+ 650°C/30 s for other parts made of insulating materials

4.2 Climatic characteristics

Storage and usage temperature: - 5°C to + 35°C

5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.

6. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos: 3 980 91/92/93 - 3 981 95 - 3 982 71/72/73/74/75/76/77/78/79/80/81/82/87/88/89/90/91/92/93 - 3 983 41/42/43/71/72/73/74/75/91/92/93 - 3 985 95 - 8 630 91/92/93/94/95 - 8 631 91/92/93/94/95 - 8 632 91/92/93/94/95 - 8 633 91/92/93/94/95 - 8 634 91/92/93/94/95 - 8 635 91/92/93/94/95 - 8 636 91/92/93/94/95 - 8 637 91/92/93/94/95 - 8 638 91/92/93/94/95 - 8 639 91/92/93/94/95 - 8 641 61/71/72/73/74/75 - 8 643 61/71/72/73/74/75 - 8 645 61/71/72/73/74/75 - 8 646 61/71/72/73/74/75 - 8 647 71/72/73 - 8 648 71/72/73/74) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrand.com/ecatalogue