

19439000	<b>DATA SHEET</b>	
Valid from: 14.11.2025	<b>EPIC® H-A 10 TBF</b>	

## Description

- The standard for housings. Large selection of different inserts.
- Easy-to-grip, user-friendly design makes it easy to plug and unplug the connector.



## General Characteristics

Series	H-A 10
Locking	single lever
Cable entry	top
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature Range	-40°C to +125°C

## Materials and Surfaces

Housing	aluminium alloy, powder-coated, grey
Lever	steel, zinc-plated

## Approvals

UL-Approval, E-File-Number	E75770
----------------------------	--------

## Standard

Safety Standard	IEC 61984
-----------------	-----------


## Versions

Article number	Article description	Thread M
19439000	EPIC® H-A 10 TBF M20	M20x1,5
79450000	EPIC® H-A 10 TBF M25	M25x1,5

Creator: TODV1/BU EPIC Released: MAJU2/BU EPIC	Document: DB19439000EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

19439000	<b>DATA SHEET</b>	
Valid from: 14.11.2025	EPIC® H-A 10 TBF	

## Technical Drawings

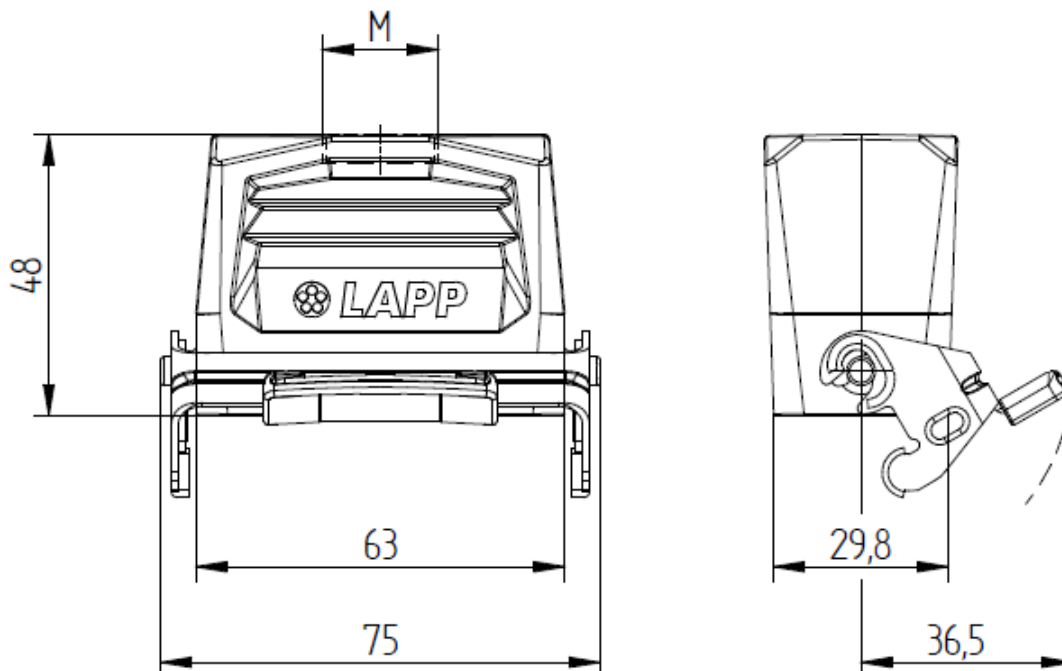

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Automation

### Info

Universal, robust metal housings size H-A 10

### Application range

Plant engineering, Light & sound technology, Plastics industry

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: TODV1/BU EPIC Released: MAJU2/BU EPIC	Document: DB19439000EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------