
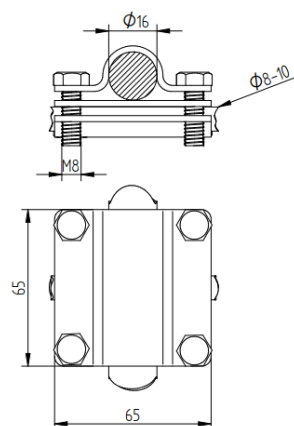


DATA SHEET

Cross-connector L-65 for wire $\varnothing(8-10)$ mm, flat conductor ≤ 40 mm and rod $\varnothing 16$ mm

Product code

111112



Technical description

Connector for cross and T-connections. The connector is used for $\varnothing(8-10)$ mm wire, ≤ 40 mm cooper and $\varnothing 16$ mm rod for lightning protection, grounding and equipotential bonding systems. Mounting by means of 4pcs M8x25 hexagon screws. Maximum lightning current carrying capacity 50kA.

Technical data

Material	Hot dip galvanized steel, StZn
Weight (1 unit)	0,38 kg
In accordance with the standard	PN-EN-62305-3
Meets the requirements of the standard	PN-EN 62561-1
Ean code	5903699800843
Customs code	83024190

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.
The illustrations shown are not binding.