


## DATA SHEET

### Unthreaded earth electrode L-1500 Ø16

#### Product code

216012

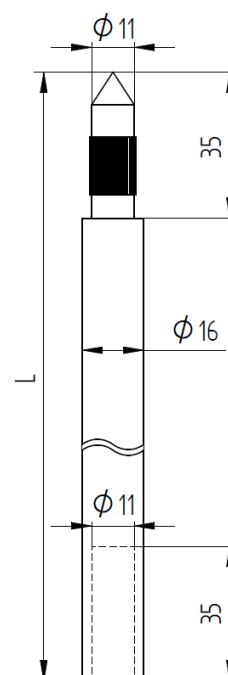

#### Technical description

Rod used in lightning protection, earthing and potential equalisation installations. Installation by driving in successive bars using the tongue-and-groove method. Zinc coating thickness according to EN ISO 1461:  $\leq 70$  micrometers  $\mu\text{m}$ .

#### Technical data

<b>Material</b>	Hot dip galvanized steel, StZn
<b>Weight (1 unit)</b>	2,55 kg
<b>In accordance with the standard</b>	EN 62305
<b>Meets the requirements of the standard</b>	EN 62561-2
<b>Ean code</b>	5903699801581
<b>Customs code</b>	85354000

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.  
The illustrations shown are not binding.