
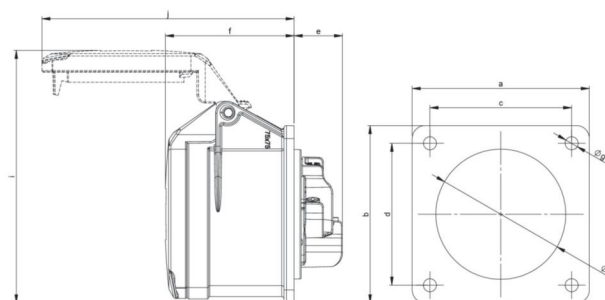


| | |
|------------------------|---|
| article# | 323-4f7 |
| article description | CEE-flanged socket straight (75x75mm) 32A 3p 4h IP44 |
| description long | CEE-flanged socket straight (75x75mm) 32A 3p 4h IP44 housing material: PA6 rated current: 32A number of poles: 3 (2P+PE) clock-position: 4h rated voltage/frequency: 100-130V~ / 50+60Hz contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 75x75 mm / 60x60 mm IP protection class: IP44 |
| GTIN (EAN) | 9003399045974 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.167 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|-------------------------|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Number of poles | 3 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |
| Flange size vertical | 75 mm |
| Drill hole distance vertical | 60 mm |
| Flange size horizontal | 75 mm |
| Drill hole distance horizontal | 60 mm |

| | |
|------------------------|------------------------|
| a | 75 mm |
| b | 75 mm |
| c | 60 mm |
| d | 60 mm |
| e | 23 mm |
| f | 67 mm |
| g | 5,5 mm |
| h | 55 mm |
| i | 112 mm |
| j | 122 mm |
| wire flexible | 2,5-6 mm ² |
| wire solid | 2,5-10 mm ² |
| contact screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

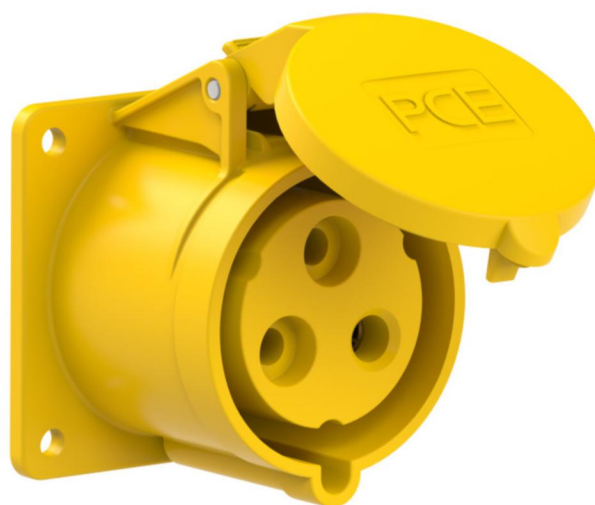

<https://www.pcelectric.at/shop/en/?func=detail&artnr=323-4f7>