


DATA SHEET

Universal connector for wire

Product code

102112

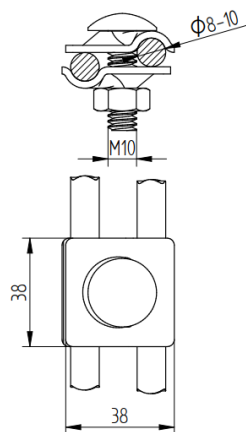

Technical description

Connector for cross and T-type connections. The connector is used for $\varnothing(8-10)$ mm wire for lightning protection, grounding and equipotential bonding system. Mounting with a M10x30 lock screw. Maximum lightning current carrying capacity of 50kA.

Technical data

Material	Hot dip galvanized steel, StZn
Weight (1 unit)	0,1 kg
In accordance with the standard	PN-EN-62305-3
Meets the requirements of the standard	PN-EN 62561-1
Ean code	5903699800423
Customs code	83024190

Due to continuous technological development, the company reserves the right to change the technical parameters of the products.
The illustrations shown are not binding.