






DAMPPROOF E









	EAN	l x w x h [mm]	W	VAC	Hz	lm	lm/W	K
DP 600 E 21W 840 VW IP65 GY	4099854080326	594x70x60	21	220-240	50/60	2835	135	4000
DP 600 E 21W 865 VW IP65 GY	4099854080340	594x70x60	21	220-240	50/60	2835	135	6500
DP 1200 E 42W 840 VW IP65 GY	4099854080364	1194x70x60	42	220-240	50/60	5670	135	4000
DP 1200 E 42W 865 VW IP65 GY	4099854080388	1194x70x60	42	220-240	50/60	5670	135	6500
DP 1500 E 52W 840 VW IP65 GY	4099854080401	1494x70x60	52	220-240	50/60	7020	135	4000
DP 1500 E 52W 865 VW IP65 GY	4099854080425	1494x70x60	52	220-240	50/60	7020	135	6500
DP 1500 E 52W 840 N IP65 GY	4099854080487	1494x70x60	52	220-240	50/60	6760	130	4000
DP 1500 E 52W 865 N IP65 GY	4099854080500	1494x70x60	52	220-240	50/60	6760	130	6500
DP 1500 E 52W 840 VN IP65 GY	4099854080449	1494x70x60	52	220-240	50/60	6760	130	4000
DP 1500 E 52W 865 VN IP65 GY	4099854080463	1494x70x60	52	220-240	50/60	6760	130	6500
DP 1500 E 66W 840 VW IP65 GY	4099854080524	1494x70x60	66	220-240	50/60	8910	135	4000
DP 1500 E 66W 865 VW IP65 GY	4099854080548	1494x70x60	66	220-240	50/60	8910	135	6500
DP 1500 E 66W 840 N IP65 GY	4099854080609	1494x70x60	66	220-240	50/60	8580	130	4000
DP 1500 E 66W 865 N IP65 GY	4099854080630	1494x70x60	66	220-240	50/60	8580	130	6500
DP 1500 E 66W 840 VN IP65 GY	4099854080562	1494x70x60	66	220-240	50/60	8580	130	4000
DP 1500 E 66W 865 VN IP65 GY	4099854080586	1494x70x60	66	220-240	50/60	8580	130	6500
DP 1500 E 80W 840 VW IP65 GY	4099854080654	1494x70x60	80	220-240	50/60	10800	135	4000
DP 1500 E 80W 865 VW IP65 GY	4099854080692	1494x70x60	80	220-240	50/60	10800	135	6500
DP 1500 E 80W 840 N IP65 GY	4099854080777	1494x70x60	80	220-240	50/60	10400	130	4000
DP 1500 E 80W 865 N IP65 GY	4099854080791	1494x70x60	80	220-240	50/60	10400	130	6500
DP 1500 E 80W 840 VN IP65 GY	4099854080715	1494x70x60	80	220-240	50/60	10400	130	4000
DP 1500 E 80W 865 VN IP65 GY	4099854080739	1494x70x60	80	220-240	50/60	10400	130	6500


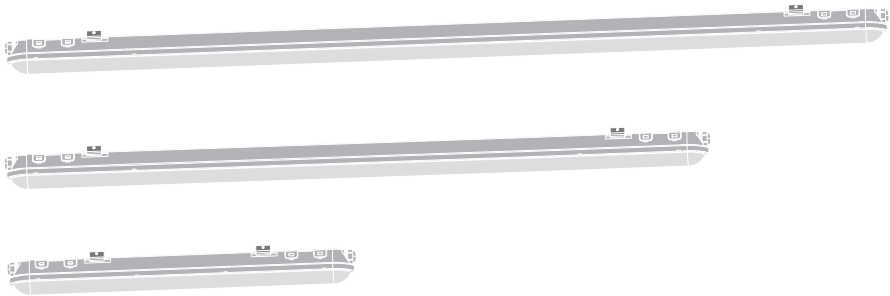


	EAN	IP	IK	∇	R _a	Δ(°C)		PF	
DP 600 E 21W 840 VW IP65 GY	4099854080326	65	08	120	>80	-20...+40	-	>0.88	0.57 kg
DP 600 E 21W 865 VW IP65 GY	4099854080340	65	08	120	>80	-20...+40	-	>0.88	0.57 kg
DP 1200 E 42W 840 VW IP65 GY	4099854080364	65	08	120	>80	-20...+40	-	>0.9	0.84 kg
DP 1200 E 42W 865 VW IP65 GY	4099854080388	65	08	120	>80	-20...+40	-	>0.9	0.84 kg
DP 1500 E 52W 840 VW IP65 GY	4099854080401	65	08	120	>80	-20...+40	-	>0.9	1.29 kg
DP 1500 E 52W 865 VW IP65 GY	4099854080425	65	08	120	>80	-20...+40	-	>0.9	1.29 kg
DP 1500 E 52W 840 N IP65 GY	4099854080487	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.65 kg
DP 1500 E 52W 865 N IP65 GY	4099854080500	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.65 kg
DP 1500 E 52W 840 VN IP65 GY	4099854080449	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.59 kg
DP 1500 E 52W 865 VN IP65 GY	4099854080463	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.59 kg
DP 1500 E 66W 840 VW IP65 GY	4099854080524	65	08	120	>80	-20...+40	-	>0.9	1.40 kg
DP 1500 E 66W 865 VW IP65 GY	4099854080548	65	08	120	>80	-20...+40	-	>0.9	1.40 kg
DP 1500 E 66W 840 N IP65 GY	4099854080609	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.66 kg
DP 1500 E 66W 865 N IP65 GY	4099854080630	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.66 kg
DP 1500 E 66W 840 VN IP65 GY	4099854080562	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.76 kg
DP 1500 E 66W 865 VN IP65 GY	4099854080586	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.76 kg
DP 1500 E 80W 840 VW IP65 GY	4099854080654	65	08	120	>80	-20...+40	-	>0.9	1.40 kg
DP 1500 E 80W 865 VW IP65 GY	4099854080692	65	08	120	>80	-20...+40	-	>0.9	1.40 kg
DP 1500 E 80W 840 N IP65 GY	4099854080777	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.66 kg
DP 1500 E 80W 865 N IP65 GY	4099854080791	65	08	90° x 60°	>80	-20...+40	-	>0.9	1.66 kg
DP 1500 E 80W 840 VN IP65 GY	4099854080715	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.78 kg
DP 1500 E 80W 865 VN IP65 GY	4099854080739	65	08	80° x 30°	>80	-20...+40	-	>0.9	1.78 kg

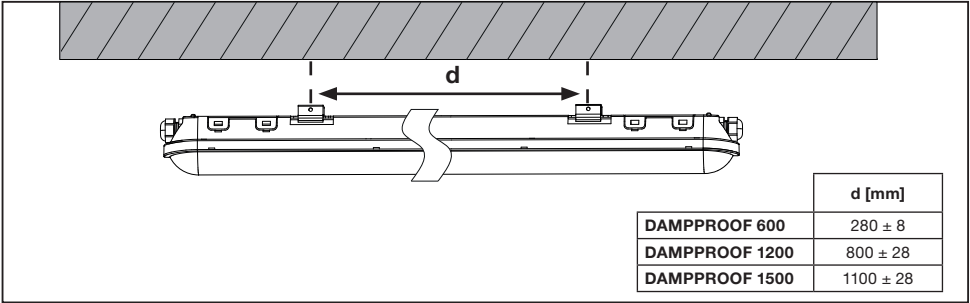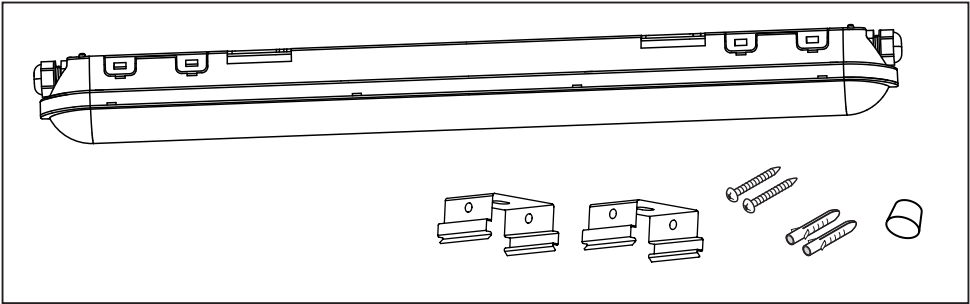

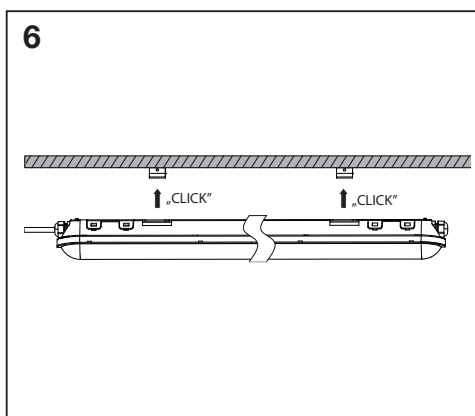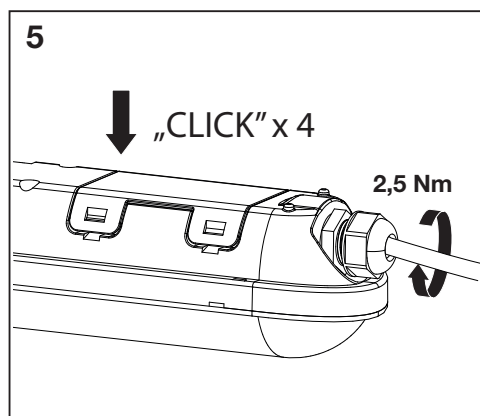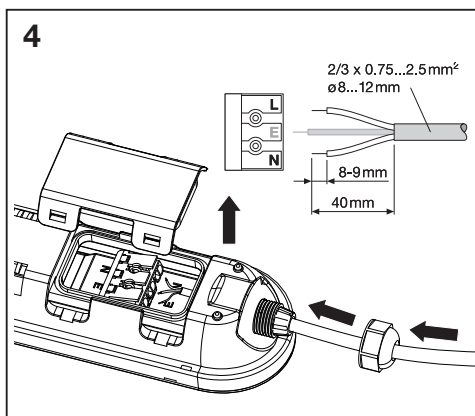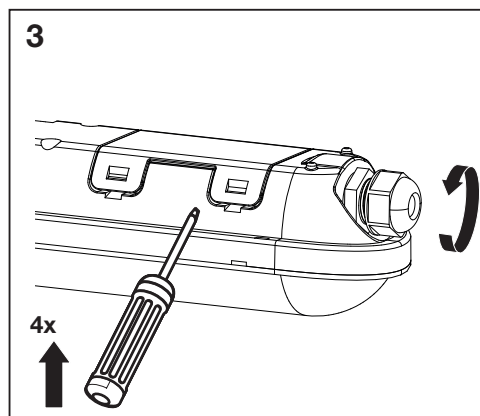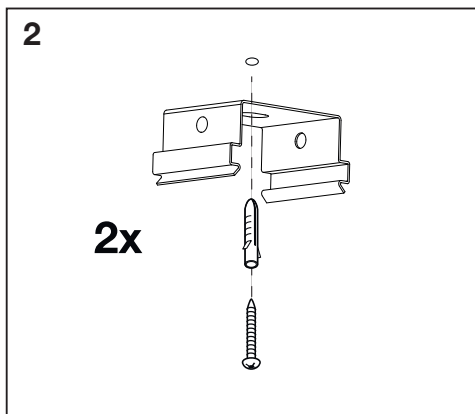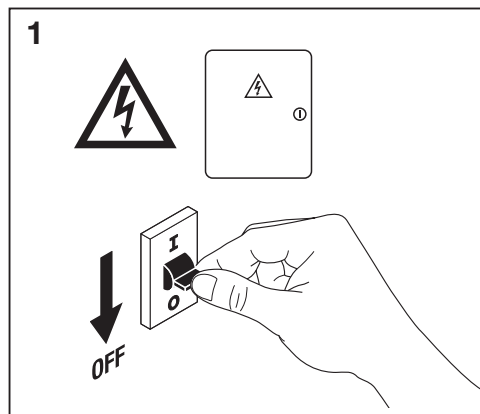

7

ON
↑

	[W]	Vac Hz	Max [W]	Max [A]	nx	Inrush current [A]	Th50 [μs]	B10	B16	B32	C10	C16	C32
DAMPPROOF 600 21W	21	220-240 50/60	420	6,89	20	7,60	12,3	65	98	209	65	104	209
DAMPPROOF 1200 42W	42	220-240 50/60	630	7,52	15	3,08	16,4	33	54	108	33	54	108
DAMPPROOF 1500 52W	52	220-240 50/60	624	7,44	12	4,04	9,1	27	43	87	27	42	87
DAMPPROOF 1500 66W	66	220-240 50/60	660	7,44	10	3,08	16,4	21	34	69	21	34	69
DAMPPROOF 1500 80W	80	220-240 50/60	720	7,60	9	3,08	16,4	20	33	66	20	33	66




Raccolta Carta
Verifica le disposizioni
del tuo comune.



FR
Cet appareil,
ses accessoires
et son cordon,
se recyclent



Points de collecte sur www.quefairedemesdechets.fr



C10449057
G11209765

18.11.24

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

® LEDVANCE Ltd, Sterling House, 810
Mandarin Court, Warrington, Cheshire,
WA1 1GG, United Kingdom