


| | |
|------------------------|--|
| article# | 3722f9v |
| article description | CEE-flanged socket straight 54x60mm 32A 2p 24VAC 50/60Hz IP66/IP67 TWIST |
| description long | CEE-flanged socket straight 54x60mm 32A 2p 24VAC 50/60Hz IP66/IP67 TWIST housing material: PA6 rated current: 32A number of poles: 2 (2P) rated voltage/frequency: 24V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 54x60 mm / 44x44 mm IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399308338 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.130 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|---------------------------|
| ETIM 9.0 | EC001317 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 20-25 V (50+60 Hz) violet |
| Number of poles | 2 |
| Identification colour | Purple |
| Degree of protection (IP) | IP67 |
| Connection system | Screw terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |
| Flange size vertical | 60 mm |
| Drill hole distance vertical | 44 mm |
| Flange size horizontal | 54 mm |
| Drill hole distance horizontal | 44 mm |

| | |
|------------------------|------------------------|
| a | 54 mm |
| b | 60 mm |
| c | 44 mm |
| d | 44 mm |
| e | 19 mm |
| f | 48 mm |
| g | 5,5 mm |
| h | 43 mm |
| i | 100 mm |
| j | 93 mm |
| wire flexible | 1-10 mm ² |
| wire solid | 1,5-10 mm ² |
| contact screws | 160 Ncm |
| dismantling length | 70 mm |
| stripping length | 14-16 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

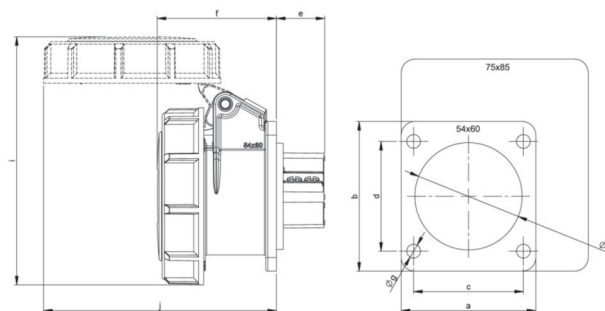

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3722f9v>