

Technical data sheet

Flat angle hood, for device installation trunking Rapid 45-2
type GK-53100

Item number: 6113092



Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.



Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|------------------------------------|--|
| Item number | 6113092 |
| Type | GK-FH53100LGR |
| Description 1 | Flat angle |
| Description 2 | hood fitting |
| Manufacturer | OBO |
| Dimension | 142x142x56 |
| Colour | Light grey; RAL 7035 |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 10.911 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,6366 kg CO2e / 1 Piece |


Technical data sheet

Flat angle hood, for device installation trunking Rapid 45-2
type GK-53100

Item number: 6113092



Dimensions

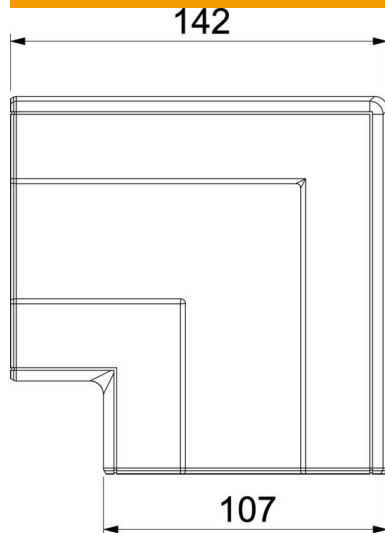

| | |
|--------|---------|
| Length | 142 mm |
| Width | 107 mm |
| Height | 55.5 mm |

Technical data

| | |
|-----------------------------------|--------------------------|
| Number of covers | 1 |
| Version for | Hood fitting |
| for duct width | 100 mm |
| for trunking height | 53 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Cross-over |
| Mounting perforation in base | no |
| Cover width | 0 mm |
| Cover width 2 | 0 mm |
| Cover width 3 | 0 mm |
| Change of direction | Vertical, rising/falling |
| Protection rating | IP40 |
| Protective film | no |
| Protection rating IK code | IK08 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |