

Ledinaire surface-mounted  
SM065C

**IP40**

**220V  
240V**

**50Hz  
60Hz**

**Life  
50K hrs  
@L80**



**Life  
75K hrs  
@L70**

Max. 35°C  
Min. -10°C



**GLOW WIRE  
650 °C**


Energy efficiency class of light source
D

	IP	IK	L×W×H1 (mm)	
SM065C 41S/840 PSU W60L60 OC	IP40/IP20	IK02	595x595x40	2
SM065C 41S/840 PSU W60L60 NOC	IP40/IP20	IK02	595x595x40	1.6
SM065C 41S/840 PSU W60L60 OC 4PK	IP40/IP20	IK02	595x595x40	1.9
SM065C 41S/840 PSU W60L60 NOC 4PK	IP40/IP20	IK02	595x595x40	1.6

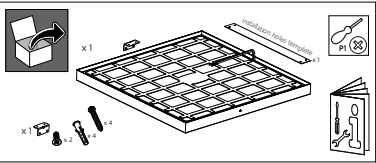


Surface mounted

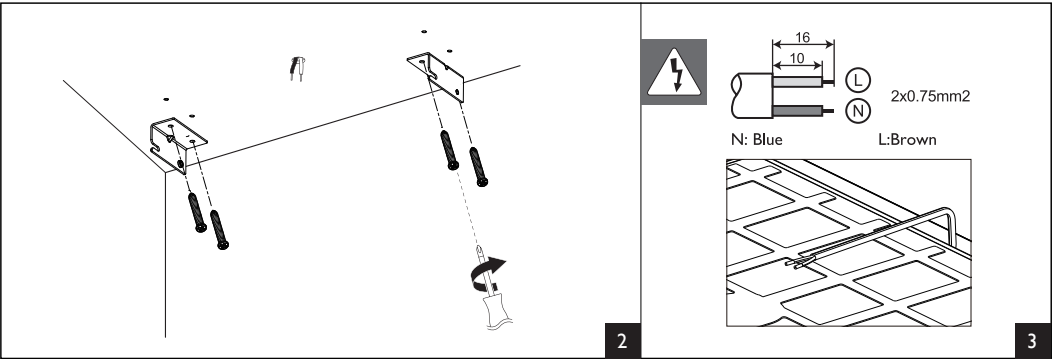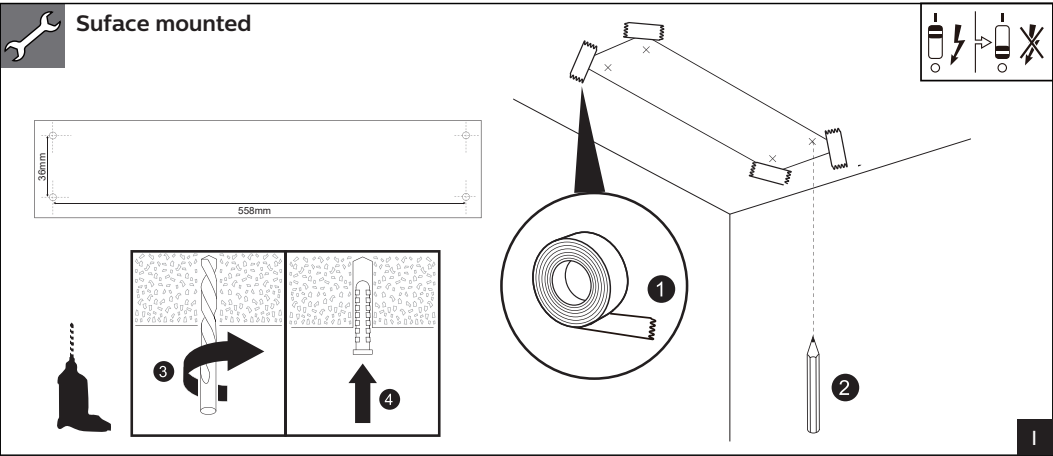


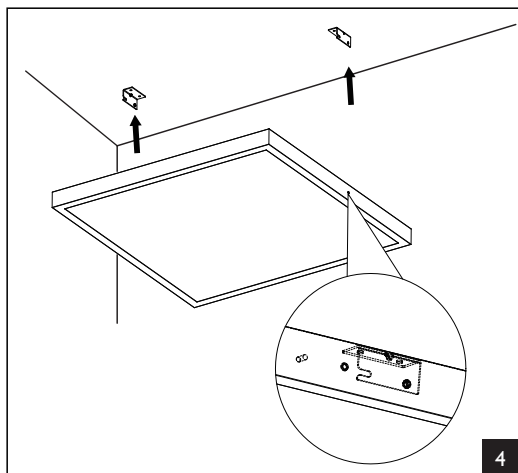


4

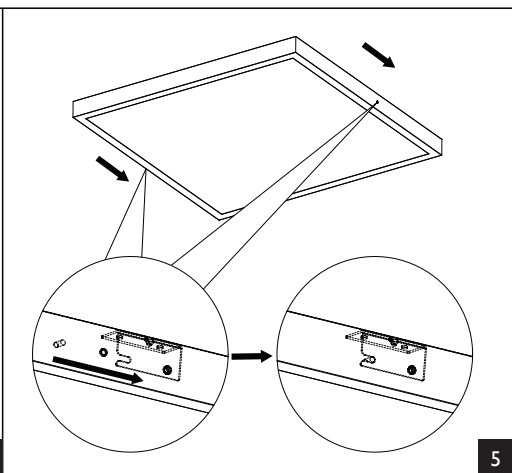

5

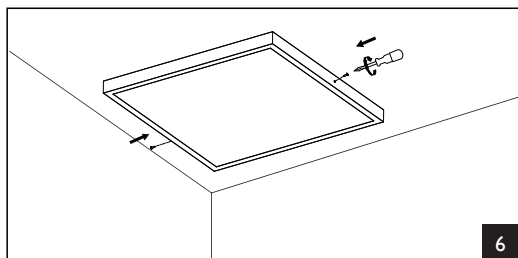


6

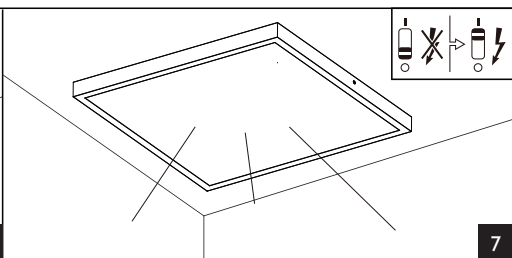

7

#### Inrush current



#### 34W

##### Electrical characteristics

I <sub>max</sub> (A)	17.8
T <sub>ref</sub> (μs)	287
MCB	Luminaire Max.
B-10 A	11
B-13 A	15
B-16 A	20
C-10 A	21
C-13 A	28
C-16 A	35