

| | | |
|---------------------------|------------------------|---|
| 52104450 | DATA SHEET |  |
| Valid from: 24.11.2023 | SKINDICHT® ME-M | |


The SKINDICHT® ME-M enlargers enable the use of the cable glands with bigger outer thread than the already existing thread openings on machines, devices and housings.



Technical features:

| | |
|-------------------|--|
| Material | Brass, nickel-plated Brass lead free, nickel plated |
| External tread | M12x1.5 up to M63x1.5 acc. to EN 60423 |
| Internal thread | M16x1.5 up to M75x1.5 acc. to EN 60423 |
| Temperature range | -60°C up to +200°C |

Norm references:

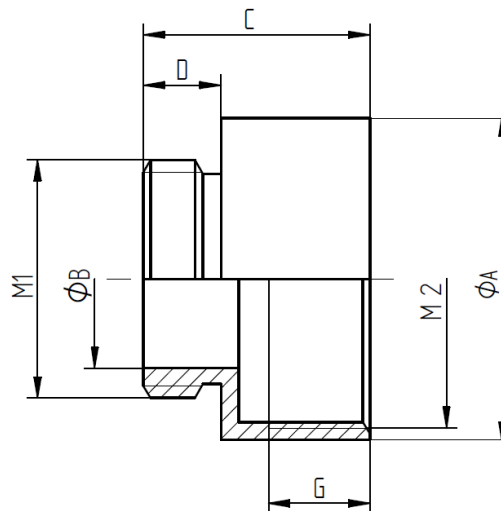


SKINDICHT® ME-M

| Thread | | Diameter | | Length | Thread length | | Part No. | |
|---------|---------|-----------|-----------|---------|---------------|---------|----------|-----------------|
| M1 | M2 | Ø A mm | Ø B mm | C mm | D mm | G mm | Brass | Brass Lead Free |
| M12x1,5 | M16x1,5 | 18 | 8 | 15 | 5 | 7,5 | 52104450 | 52104450LF |
| M16x1,5 | M20x1,5 | 22 | 12 | 17,5 | 6 | 8,5 | 52104452 | 52104452LF |
| M20x1,5 | M25x1,5 | 27 | 15 | 19 | 6,5 | 8,5 | 52104454 | 52104454LF |
| M25x1,5 | M32x1,5 | 34 | 20 | 21 | 6,5 | 9,5 | 52104456 | 52104456LF |
| M32x1,5 | M40x1,5 | 42 | 26 | 23 | 7 | 9,5 | 52104458 | 52104458LF |
| M40x1,5 | M50x1,5 | 53 | 33 | 31 | 9 | 11 | 52104460 | 52104460LF |
| M50x1,5 | M63x1,5 | 67 | 43 | 33 | 10 | 16 | 52104462 | 52104462LF |

| | | |
|---|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP Released: DAMU1/PDP | Document: DB52104450EN Version: 07 | Page 1 of 2 |
|---|---------------------------------------|-------------|

| | | |
|---------------------------|------------------------|---|
| 52104450 | DATA SHEET |  |
| Valid from: 24.11.2023 | SKINDICHT® ME-M | |

SKINDICHT® ME-M 6 Kt.

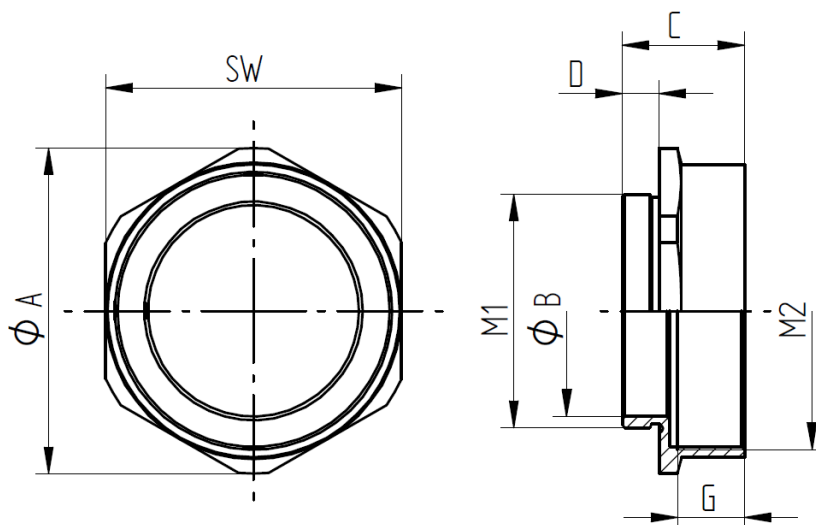

| Thread | | Wrench Size SW | Diameter | | Length C mm | Thread length | | Part No.. | |
|---------|---------|--------------------------|-----------|-----------|-----------------------|---------------|---------|-----------|--------------------|
| M1 | M2 | | Ø A mm | Ø B mm | | D mm | G mm | Brass | Brass Lead Free |
| M63x1,5 | M75x1,5 | 80 | 88 | 57 | 33 | 10 | 18 | 52104463 | 52104463LF |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|---|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP Released: DAMU1/PDP | Document: DB52104450EN Version: 07 | Page 2 of 2 |
|---|---------------------------------------|-------------|