


22260328	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M12FS	

Product description

- Sensor/actuator cable, 4-pol, PUR halogen-free, black
- straight M12-plug on straight M12-jack



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260328	AB-C4-M12MS-0,3PUR-M12FS	0,3	straight - straight
22260329	AB-C4-M12MS-0,6PUR-M12FS	0,6	straight - straight
22260330	AB-C4-M12MS-1,0PUR-M12FS	1	straight - straight
22261068	AB-C4-M12MS-1,5PUR-M12FS	1,5	straight - straight
22260331	AB-C4-M12MS-2,0PUR-M12FS	2	straight - straight
22260952	AB-C4-M12MS-4,0PUR-M12FS	4	straight - straight
22260702	AB-C4-M12MS-5,0PUR-M12FS	5	straight - straight
22260967	AB-C4-M12MS-6,0PUR-M12FS	6	straight - straight
22260893	AB-C4-M12MS-7,5PUR-M12FS	7,5	straight - straight
22260710	AB-C4-M12MS-10,0PUR-M12FS	10	straight - straight
22260966	AB-C4-M12MS-15,0PUR-M12FS	15	straight - straight
22260470	AB-C4-M12MS-20,0PUR-M12FS	20	straight - straight
22260471	AB-C4-M12MS-30,0PUR-M12FS	30	straight - straight


Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	250 V
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260328EN Version: 06	Page 1 of 3
---	---------------------------------------	-------------

22260328	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M12FS	

Mechanical properties

Plug, jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR


Line

Cable construction	4 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter	4,7 mm ± 0,15mm
Insulation color	brown, white, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	30 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 1 GΩ*km
Conductor resistance	≤ 58 Ω/km
Flame resistance	acc. to UL 758 / 1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815 DIN EN 50267-2-1
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A low adhesion abrasion resistant







Standards

Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260328EN Version: 06	Page 2 of 3
---	---------------------------------------	-------------

22260328	DATA SHEET	
Valid from: 21.12.2023	AB-C4-M12MS-(L*)PUR-M12FS	

Technical drawing

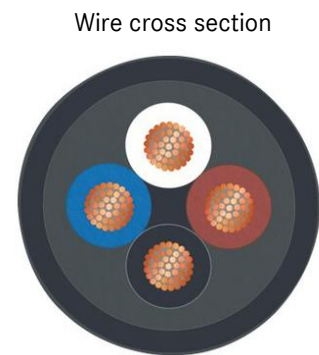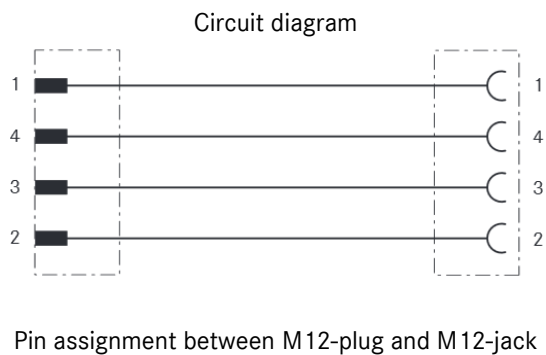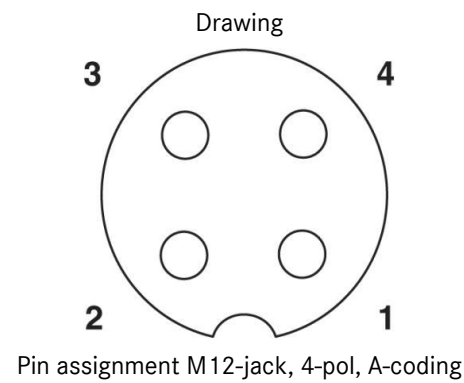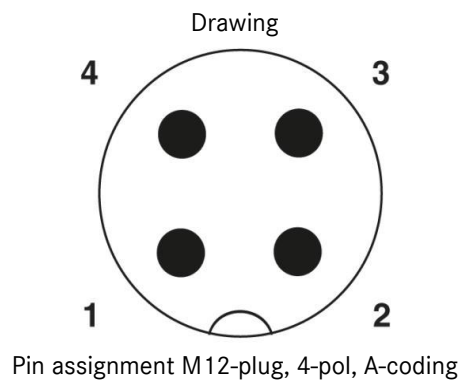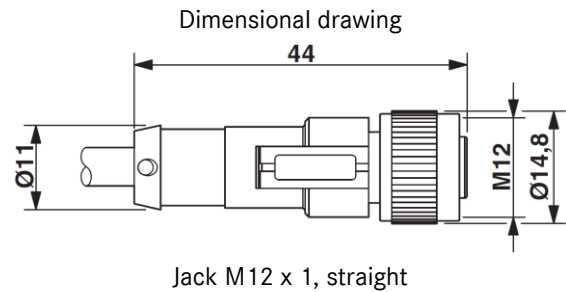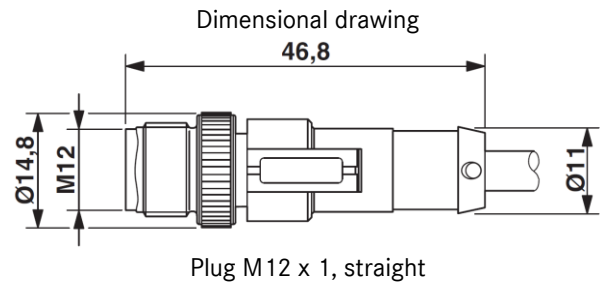

Application range
For increased mechanical load and rough operating conditions

Note
Photographs are not true to scale and do not represent detailed images of the respective products.