

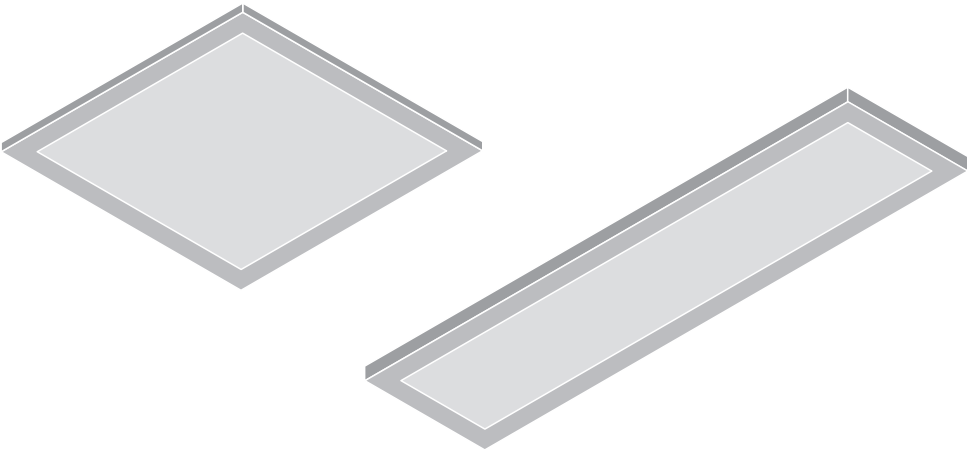
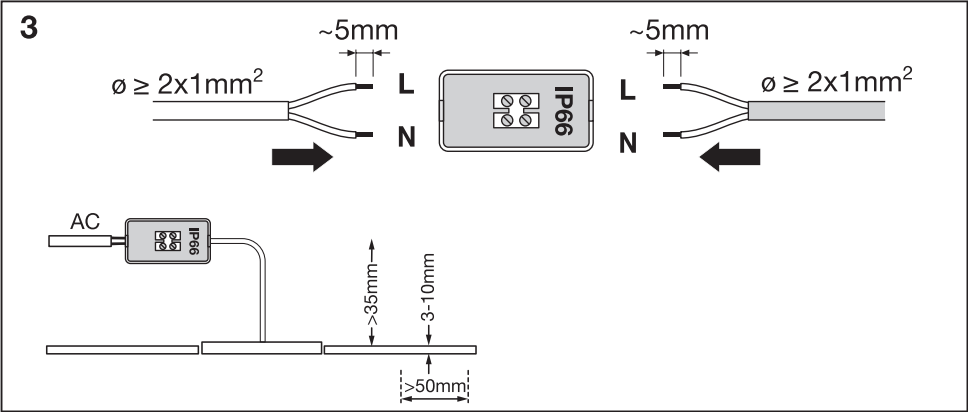
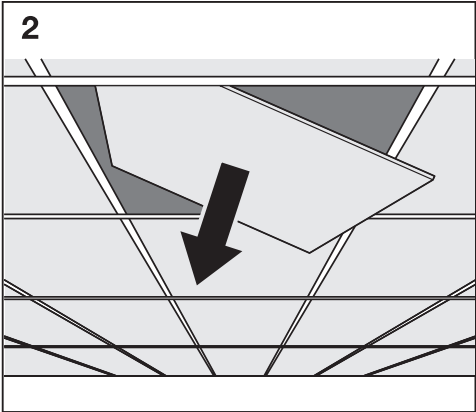





PANEL INTEGRATED 600/1200 IP65

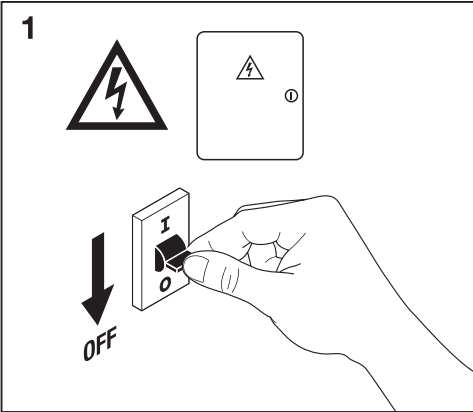


	EAN	Ø x h [mm]	W	VAC	Hz	lm	lm/W	K
PL INT 600 V 35W 840 IP65	4099854188251	595x595x50	35	220-240	50/60	4200	120	4000
PL INT 600 V 35W 840 IP65 UGR19	4099854188275	595x595x50	35	220-240	50/60	3675	105	4000
PL INT 600 V 42W 840 IP65	4099854188299	595x595x50	42	220-240	50/60	5040	120	4000
PL INT 600 V 42W 840 IP65 UGR19	4099854188312	595x595x50	42	220-240	50/60	4410	105	4000
PL INT 1200 V 35W 840 IP65	4099854188336	295x1195x50	35	220-240	50/60	4200	120	4000
PL INT 1200 V 35W 840 IP65 UGR19	4099854188350	295x1195x50	35	220-240	50/60	3675	105	4000
PL INT 1200 V 42W 840 IP65	4099854188374	295x1195x50	42	220-240	50/60	5040	120	4000
PL INT 1200 V 42W 840 IP65 UGR19	4099854188398	295x1195x50	42	220-240	50/60	4410	105	4000

	EAN	IP	IK		R _a	° (°C)	PF	
PL INT 600 V 35W 840 IP65	4099854188251	65	02	120	>80	0° .. +40°	>0.9	2,9 kg
PL INT 600 V 35W 840 IP65 UGR19	4099854188275	65	02	90	>80	0° .. +40°	>0.9	3,0 kg
PL INT 600 V 42W 840 IP65	4099854188299	65	02	120	>80	0° .. +40°	>0.9	2,9 kg
PL INT 600 V 42W 840 IP65 UGR19	4099854188312	65	02	90	>80	0° .. +40°	>0.9	3,0 kg
PL INT 1200 V 35W 840 IP65	4099854188336	65	02	120	>80	0° .. +40°	>0.9	3,1 kg
PL INT 1200 V 35W 840 IP65 UGR19	4099854188350	65	02	90	>80	0° .. +40°	>0.9	3,2 kg
PL INT 1200 V 42W 840 IP65	4099854188374	65	02	120	>80	0° .. +40°	>0.9	3,1 kg
PL INT 1200 V 42W 840 IP65 UGR19	4099854188398	65	02	90	>80	0° .. +40°	>0.9	3,2 kg

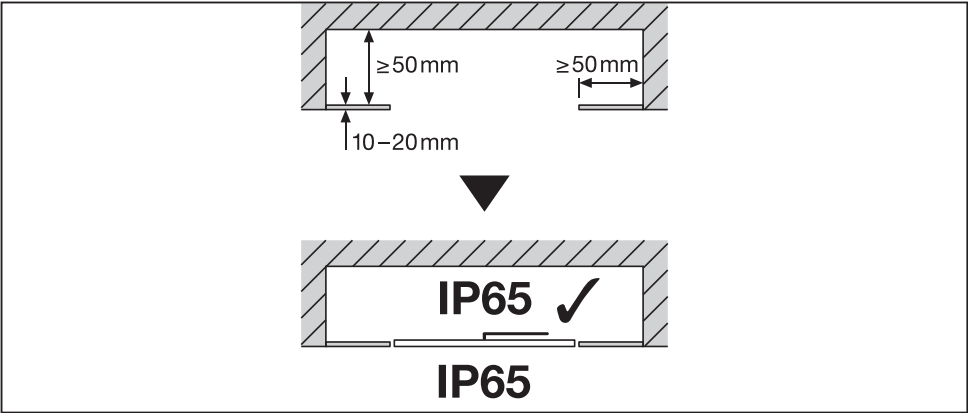


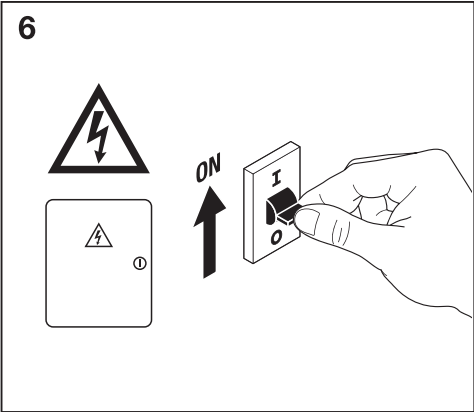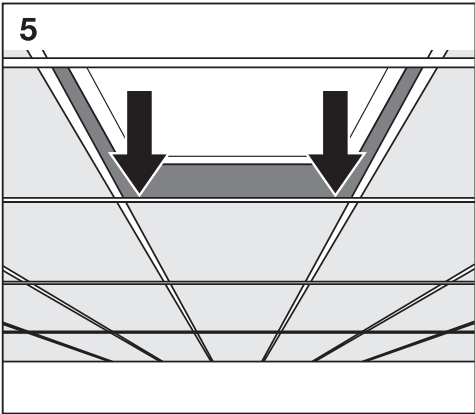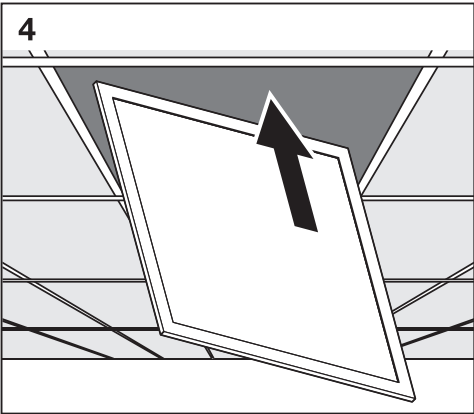

	B16A	C10A	C16A
PL INT 600/1200 V 35W IP65	n = 18	n = 15	n = 24
PL INT 600/1200 V 42W IP65	n = 16	n = 13	n = 21

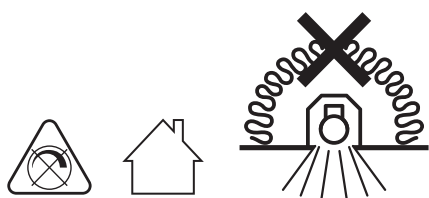

Points de collecte sur www.quefairedemesdechets.fr



C10449057
G11212509
01.01.25

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

® LEDVANCE Ltd, Sterling House, 810
Mandarin Court, Warrington, Cheshire,
WA1 1GG, United Kingdom